


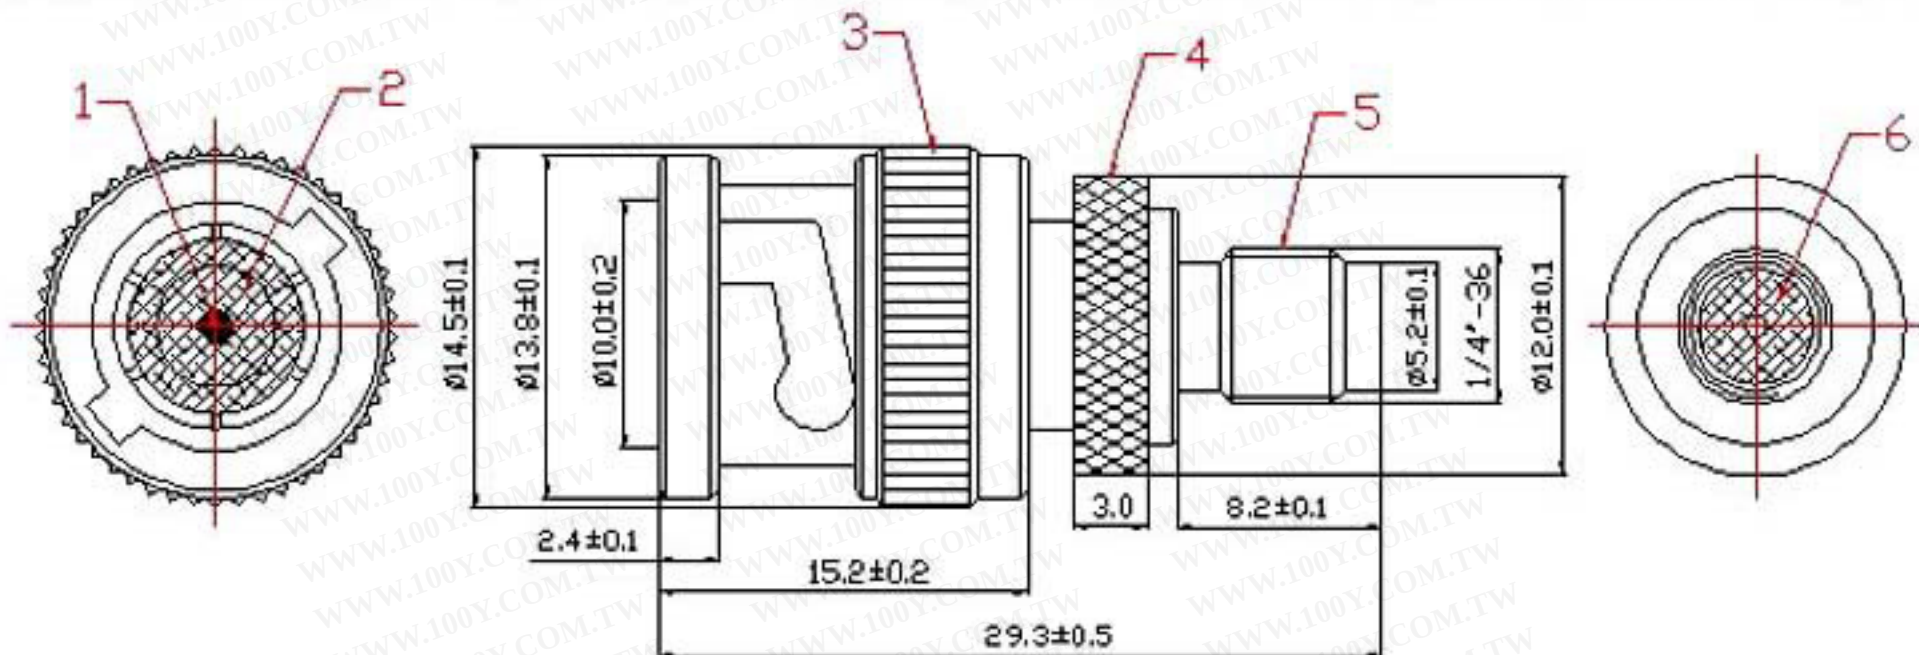

ELECTRICAL CHARACTERISTIC

- | | |
|-----|---|
| (1) | INNER CONTACT RESISTANCE: $<10m\Omega$ |
| (2) | OUTER CONTACT RESISTANCE: $<2.5m\Omega$ |
| (3) | WITHSTAND VOLTAGE:DC1500V |
| (4) | CURRENT RATING:3A/DC1500V |
| (6) | OPERATING TEMPERATURE: $-40/+80^{\circ}C$ |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

6	DIELECTRIC	TEF
5	FEMALE PART	Cu
4	BOCY	Cu
3	BNC SHELL	Zn
2	DIELECTRIC	POM
1	PIN	Cu

TOLERANCE



SIGNATURES

DATE

DRAFT: YangYongRui

06.08.08

CHECKED: HuGongXue

ITEM	DESIGNATION	MATERIAL
------	-------------	----------

REV.	ECO	PART NO.	DATE	BY
------	-----	----------	------	----

A		1231		
---	--	------	--	--

B				
---	--	--	--	--



SHEET

OF

APPROVAL:

SCALE

UNIT

REV.

TITLE

SMA Female To BNC Male

CUSTOMER