

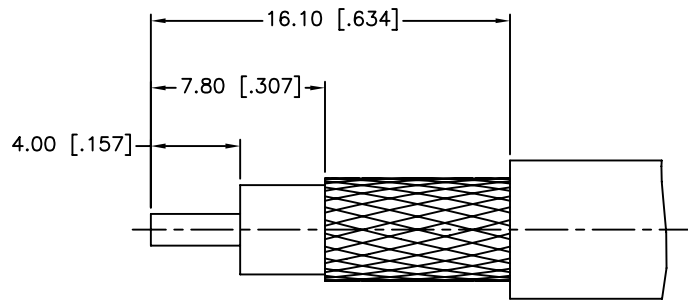
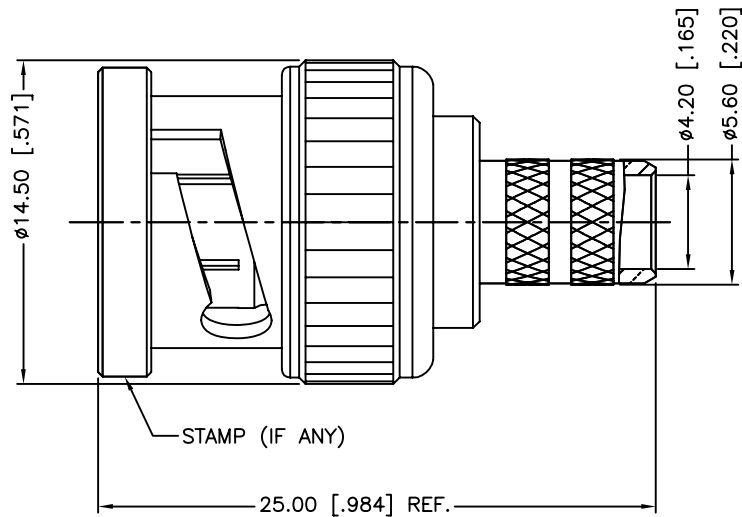


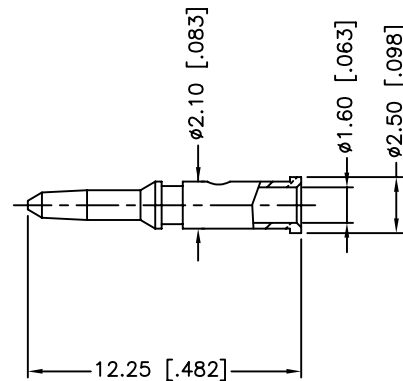

RECOMMENDED
CABLE STRIPPING DIM'S

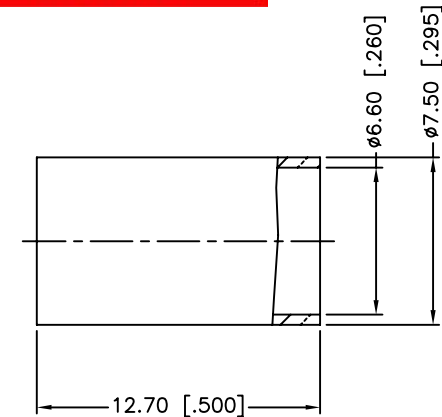

1. CRIMPED FERRULE
HEX. CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"
3. CRIMP TOOL: A

REV.	DATE	ECR NO.	DESCRIPTION
A	11/20/97	-	ADD CENTER CONTACT
B	04/08/98	-	ADD LMR240 CABLE TO TITLE
C	12/12/06	-	UPDATE DRAWING FORMAT
D	04/01/08	-	REVISE INSULATOR TO PTFE
E	06/23/10	2062	ADD CRIMP DIMENSIONS AND CRIMP TOOL INFORMATION TO DRAWINGS

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

9	FERRULE	BRASS	NICKEL	1	<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"</div> <div>DO NOT SCALE DRAWING</div>	APPROVALS	DATE	<div>Amphenol Connex</div>					
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG					06/23/10	
7	WASHER	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION <div>BNC CRIMP PLUG (FOR BELDEN RG-8/X LMR240 CABLE)</div>				
6	SPRING	SK5	NICKEL	1		ISSUED							
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. <div>112533</div>				
4	GASKET	RUBBER	RED	1									
3	INSULATOR	DELTRIN	NATURAL	1				DWG. NO. <div>112533.DWG</div>					
2	BODY	BRASS	NICKEL	1									
1	SHELL	BRASS	NICKEL	1				REV.	E	SIZE	A	SCALE	NA
DESCRIPTION MATERIAL FINISH QTY					CAD FILE C:/CONNEX/112533.DWG								