



50Ω

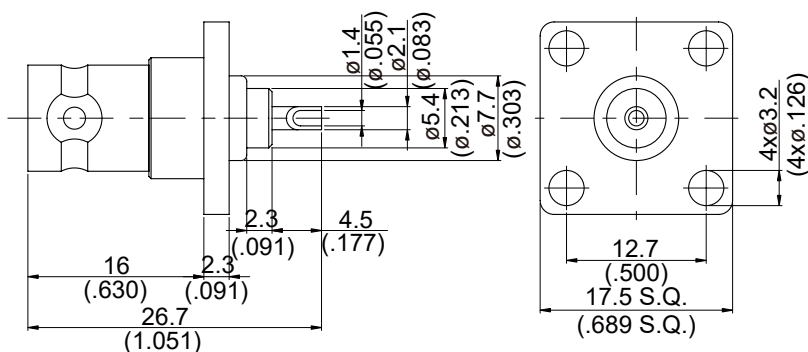

MOUNTING HOLE :

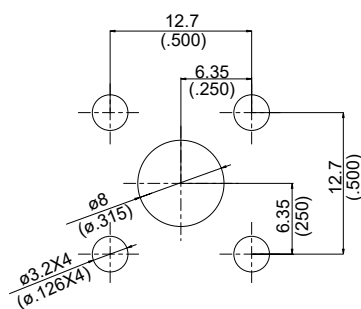

Parts	Material	Plating (Micro-inch)
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50


勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

Weight: 10.44 g

BNC	BNC864A-0000																		
Interface	MIL-STD-348B																		
Electrical Data	<table><tr><td>Impedance</td><td>50Ω</td></tr><tr><td>Frequency range</td><td>DC to 4GHz</td></tr><tr><td>VSWR</td><td>≤ 1.2 (DC to 4GHz)</td></tr><tr><td>Insertion loss</td><td>≤ 0.1 x √f(GHz)dB</td></tr><tr><td>Insulation resistance</td><td>≥ 5000MΩ</td></tr><tr><td>Contact resistance inner conductor</td><td>≤ 1.5mΩ</td></tr><tr><td>Contact resistance outer conductor</td><td>≤ 1mΩ</td></tr><tr><td>Dielectric withstanding voltage (at sea level)</td><td>1500 V rms</td></tr><tr><td>Working voltage (at sea level)</td><td>500 V rms</td></tr></table>	Impedance	50Ω	Frequency range	DC to 4GHz	VSWR	≤ 1.2 (DC to 4GHz)	Insertion loss	≤ 0.1 x √f(GHz)dB	Insulation resistance	≥ 5000MΩ	Contact resistance inner conductor	≤ 1.5mΩ	Contact resistance outer conductor	≤ 1mΩ	Dielectric withstanding voltage (at sea level)	1500 V rms	Working voltage (at sea level)	500 V rms
Impedance	50Ω																		
Frequency range	DC to 4GHz																		
VSWR	≤ 1.2 (DC to 4GHz)																		
Insertion loss	≤ 0.1 x √f(GHz)dB																		
Insulation resistance	≥ 5000MΩ																		
Contact resistance inner conductor	≤ 1.5mΩ																		
Contact resistance outer conductor	≤ 1mΩ																		
Dielectric withstanding voltage (at sea level)	1500 V rms																		
Working voltage (at sea level)	500 V rms																		
Mechanical Data	<table><tr><td>Recommended coupling nut torque</td><td>0.6 to 2.5 inch lbs</td></tr><tr><td>Contact captivation-axial</td><td>≥ 6.1 lbs</td></tr><tr><td>Durability (mating)</td><td>≥ 500</td></tr></table>	Recommended coupling nut torque	0.6 to 2.5 inch lbs	Contact captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500												
Recommended coupling nut torque	0.6 to 2.5 inch lbs																		
Contact captivation-axial	≥ 6.1 lbs																		
Durability (mating)	≥ 500																		
Environmental Data	<table><tr><td>Temperature range</td><td>-65°C to +165°C</td></tr><tr><td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr><tr><td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr><tr><td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr><tr><td>RoHS</td><td>Compliant</td></tr></table>	Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling																			

BNC864A-0000

S11

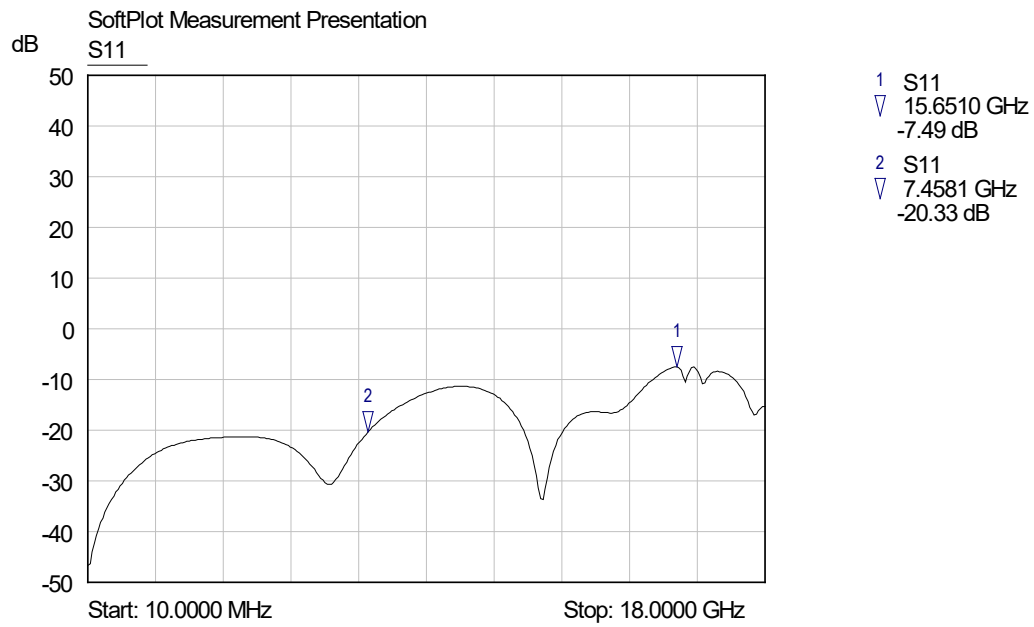

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>