

規格書 | 產品型號: 2002-404

Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; light gray

www.wago.com/2002-404



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

資料 電氣資料

Ratings per IEC/EN 60664-1

額定電壓 (III / 3)	800 V
額定電流	25 A

Approvals Ex

額定電流 (Ex e II)	20 A
----------------	------



幾何數據

寬度	19,1 mm / 0.752 inch
高度	19 mm / 0.748 inch
深度	4,1 mm / 0.161 inch

材料資料

顏色	淺灰色
火災負載	0.014 MJ
重量	1.9 g

商業資料

Product Group	22 (TOPJOB S)
包裝類型	bag
Country of origin	DE
GTIN	4055143687362
Customs Tariff No.	85366990990

Counterpart

下載

Documentation

Additional Information

Technical explanations	2019/4/3	pdf 2.1 MB	下載
------------------------	----------	---------------	----

CAD/CAE-Data

CAD data

2D/3D Models 2002-404	URL	下載
-----------------------	-----	----



CAE data

EPLAN Data Portal 2002-404	下載
----------------------------	----

WSCAD Universe 2002-404	下載
-------------------------	----

Installation Notes

Jumpered

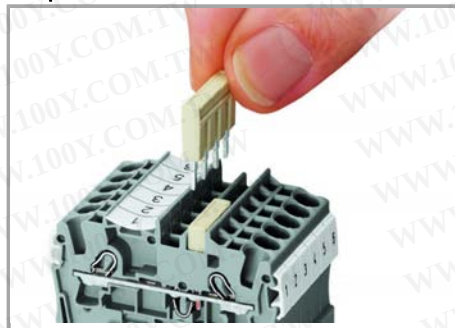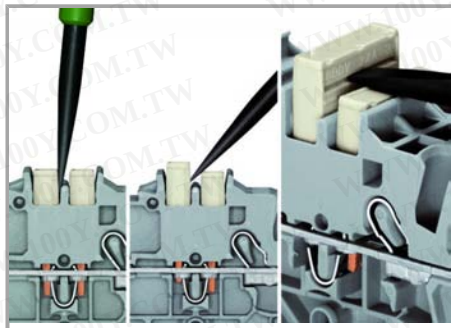

The push-in type jumper bar system is based on the common plug and socket principle. Each terminal block is spring-loaded with a double socket and a resilient CrNi steel spring. The jumper contact material is pure electrolytic copper, which allows for an extremely small design capable of carrying the full-rated current of the terminal block. Ground terminal blocks can also be commoned using the same jumper system. Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).

Removing a push-in type jumper bar.

Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

Jumpered



Custom push-in type jumper bars are created by breaking off jumper contacts.



Marking a push-in type jumper bar using a felt-tip pen.


500 V

300 V

Jumpered



Stepping down via push-in type jumper bar.

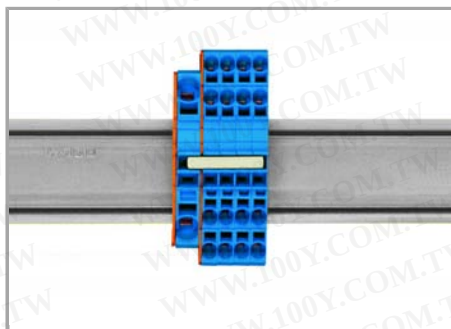


Stepping down via push-in type jumper bar.



Stepping down via push-in type jumper bar.

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm² (6 AWG) to 6 mm² (10 AWG) or from 6 mm² (10 AWG) to 2.5 mm² (14 AWG) (see illustration above).

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm² (6 AWG) and 10 mm² (8 AWG) and one cross-section size for 6/4/2.5 mm² (10/12/14 AWG). An example: from 16 mm² (6 AWG) to 6 mm² (10 AWG) (see illustration above) or from 10 mm² (8 AWG) to 4 mm² (12 AWG).

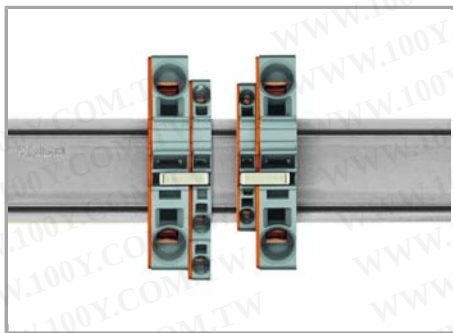

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Note:

The total current of the outgoing circuits shall not exceed the nominal current of the step-down jumper/push-in type jumper bar.

產品系列

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

顯示該系列的所有產品。