美式通用型熔断器
圆柱型与刀型熔断器
小型与等级CC熔断器座

600 伏特小型与等级CC熔断器座

Ferraz Shawmut公司的小型熔断器座符合所有30安培的1-1/2" x 13/32"小型熔断器使用。等级CC熔断器座若夫和所有30安培的等级CC熔断器使用。选择合适的外壳、螺丝火压板连接器可以满足各种绞合铜线或实心铜线应用。绝缘器是玻璃纤维填充的聚碳酸酯（GFPC），其介电强度经过验证超过2500V。熔断器座拥有独特的加法器底座，能够直接套接1、2、或3个电极底座，形成所需的多极分端底座。所有的熔断器夹具由高导性的镀锌铜合金组成。

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

额定值

- 600VAC: 30A
- 耐受额定值：200kA的使用螺丝、压板或外壳接线，10kA的使用快速接头。
- 温度/可燃性：GFPC绝缘器的额定为125ºC RT，94V-0可燃性

审核

- 所有熔断器座符合UL Std. 512的标准要求
- 小型熔断器座为UL认证元件，IZLT2向导, 文件E52283
- CSA验证的等级6225, 文件32169
- 等级CC熔断器座 UL登陆,IZLT向导, 文件E52283
- CSA验证的等级6225, 文件32169

推荐的熔断器用法

小型熔断器座与ATQ, ATM, A6Y-2B, A25Z-2,TRM, OTM, A13X-2, GFN, GGU, A60Q-2相使用
等级CC熔断器座与ATDR, ATMR, ATQR相使用

夹具与连接器类型

30A 小型/CC

铜质外壳连接器

双快速接头的螺丝

双快速接头的压板

双快速接头的压板
（等级CC排拒型末端）

装置与熔断器装置

美式通用型熔断器
圆柱型与刀型熔断器座
小型与等级CC熔断器座

600 伏特小型与等级CC熔断器座

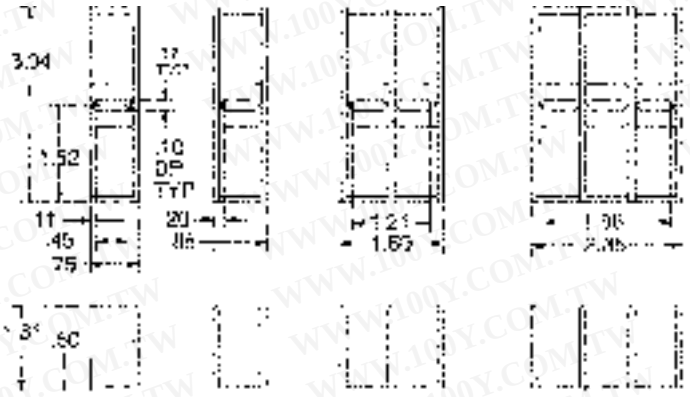

推荐用于小型与等级CC熔断器上的装配螺丝: #8 (.164”直径)

600 伏特, 30A 小型等级CC熔断器座

连接器			熔断器类型 小型			等级 CC			连接器扭距
类型	电线	电极*	编目号码	参考编号	登陆	编目号码	参考编号	登陆	In-lb (N.m)
	Cu		30310	N211888		30310R	W204857		
	#10-14	1	30311	A212405		30311R	R212397		
		2	30312	E214456	&	30312R	Z212910	&	20 (2.3)
		3	30313	F214963		30313R	M213428		
		4	30314	J215472		30314R	F213928		
	Cu		30320	S218033		30320R	Z217510		
	#10-14	1	30321	Y218544		30321R	M218534		
		2	30322	K222787	&	30322R	Y219579	&	20 (2.3)
		3	30323	B201642		30323R	B222779		
		4	30324	H211377		30324R	Q201632		
	Cu		30350	F214457		30350R	N213429		
	#6-14	1	30351	G214964		30351R	G213929		
		2	30352	L216486	&	30352R	V214447	&	35 (4)
		3	30353	Z217004		30353R	X214955		
		4	30354	J217519		30354R	Z215463		

备注：小型或等级CC加法器电极转换至单电极时，需要采用末端阻隔#U09301
* 可采用各种电极数量。将编目号码的最后一位数字以所需电极数代替。例如： 303112 是12个电极的螺丝/双QC连接器的小型熔断器座
N电极的总宽度 = (N x .76) + .08 英寸. 12 电极= (12 x .76”) + .08” = 9.20”.
备注: 参见熔断器座附件: DFC3M, DFC3LP, DRM

MIDGET & CLASS CC 600 VOLT/FUSE BLOCKS

600 VOLT MIDGET AND CLASS CC FUSE BLOCKS

Ferraz Shawmut Midget Fuse Blocks accommodate all 30 ampere 1-1/2" x 13/32" midget fuses. Class CC Fuse Blocks accommodate all 30 ampere Class CC fuses. A choice of box, screw, or pressure-plate connectors fit a wide range of stranded or solid copper wire. Insulators are glass-filled polycarbonate (GFPC) with verified dielectric strength in excess of 2500V. Fuse blocks feature a unique adder block which can be snapped onto 1-, 2- or 3-pole blocks to form multi-pole segmented blocks of as many poles as desired. All fuse clips are made of high conductivity tin-plated copper alloy.

Ratings

- 600VAC: 30A
- Short Circuit Current Rating: CC, 200kA using screw, pressure plate or box connections, 10kA using quick connects Midget, 100kA dependent I.R. 10kA w/quick connect termination
- Temperature/ flammability: GFPC insulators rated 125˚C, 94V-0 flammability

Approvals

- All fuse blocks meet the requirements of UL Std. 512

Midget Block

- UL Recognized Component Guide IZLT2, File E52283
- CSA Certified Class 6225, File 32169

Class CC Block

- UL Listed, Guide IZLT, File E52283
- CSA Certified Class 6225, File 32169

H

RECOMMENDED FUSE USAGE

Midget Fuse Block . . . . . use with **ATQ, ATM, A6Y-2B, A25Z-2, TRM, OTM, A115QS-2, GFN, GGU, A60Q-2**

Class CC Fuse Block. . . . use with **ATDR, ATMR, ATQR**

Clip & Connector Types

30A MIDGET/CC

COPPER BOX CONNECTOR	SCREW WITH DOUBLE QUICK-CONNECTS	PRESSURE PLATE WITH DOUBLE QUICK-CONNECTS	PRESSURE PLATE WITH DOUBLE QUICK-CONNECTS (CLASS CC REJECTION END)

MIDGET & CLASS CC

600 VOLT/FUSE BLOCKS

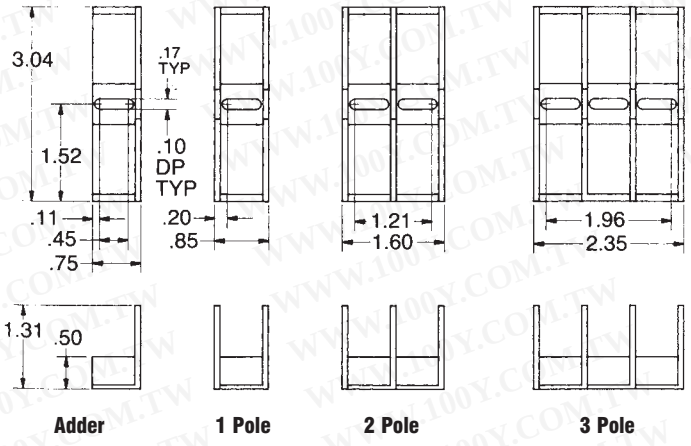

Recommended mounting screws for all Midget and Class CC fuse blocks: #8 (.164" dia.)

600 Volt, 30A Midget and Class CC Fuse Blocks

CONNECTOR		POLES*	CATALOG NUMBER				CONNECTOR TORQUE
			TYPE OF FUSE				
TYPE	WIRE RANGE		MIDGET	LISTING	CLASS CC	LISTING	In - lb
Screw w/double quick connects at both ends	Cu #10-14	ADDER 1 2 3 4	30310 30311 30312 30313 30314	& CSA	30310R 30311R 30312R 30313R 30314R	UL & CSA	20
Pressure plate (sems) w/double quick connects at both ends	Cu #10-14	ADDER 1 2 3 4	30320 30321 30322 30323 30324	& CSA	30320R 30321R 30322R 30323R 30324R	UL & CSA	20
Copper box	Cu #6-14	ADDER 1 2 3 4	30350 30351 30352 30353 30354	& CSA	30350R 30351R 30352R 30353R 30354R	UL & CSA	35

Note: To convert Midget or Class CC adder pole to single pole, use end barrier #U09301.

* Available in any number of poles. Replace last digit in Catalog Number with number of poles needed.
Example: 303112 is a 12-pole screw/double QC connector Midget Fuse Block.
Total width of N poles = (N x .76) + .08 inches. 12 poles = (12 x .76") + .08" = 9.20".

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Note: Please see fuse block accessories (H 66) for information regarding fuse block accessories; DFC3M, DFC3LP or DRM.