
勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

AD-A3D3	**SMA Plug To MCX Plug** **6GHz VSWR 1.2**	**50Ω**

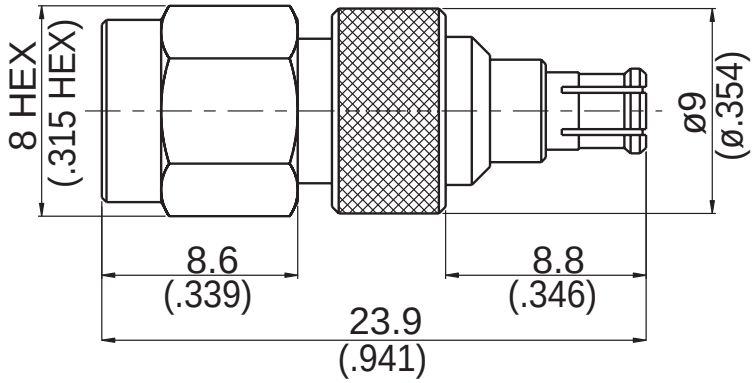

Parts	Material	Plating (Micro-inch)
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body(MCX)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 5.24 g

This part number complies with RoHS.
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A3D3	**SMA Plug To MCX Plug 6GHz VSWR 1.2**

Interface

	SMA	MCX
Standard	MIL-STD-348B	IEC 61169-36
Mechanically Compatible With	2.92 & 3.5	

Electrical Data

Impedance	50Ω
Frequency Range	DC To 6GHz
VSWR	≦1.2 (DC To 6GHz)
Insertion Loss	≦0.03 x $\sqrt{}$f(GHz) dB
Insulation Resistance	≧5000MΩ
Dielectric Withstanding Voltage (at sea level)	750 V rms
Working Voltage (at sea level)	250 V rms

Mechanical Data


	SMA	MCX
Recommended Coupling Nut Torque	4 in-lbs	NA
Coupling Proof Torque	5.3 in-lbs	NA
Coupling Nut Retention Force	≧60.7 lbs	NA
Engagement Force	NA	≦5.6 lbs
Disengagement Force	NA	1.8 to 4.5 lbs
Contact Captivation-axial	≧6.1 lbs	≧2.3 lbs
Durability (mating)	≧100	≧500

Environmental Data

Temperature Range	-55°C to +155°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Moisture Resistance	MIL-STD-202, Method 206
Corrosion	MIL-STD-202, Method 101, Condition B
RoHS	Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A3D3 (+AD-A8D8)

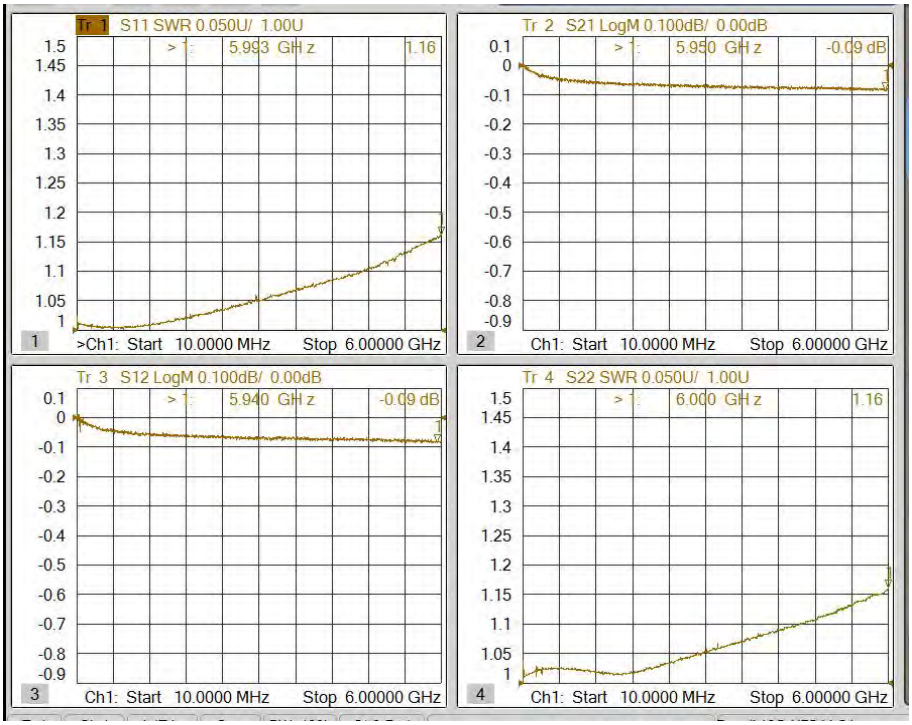

Notes:

1. IL of AD-A8D8+AD-A3D3 measured
2. IL/2 = IL of AD-A3D3

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw