

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Applications

EMI Filters are network components. It serves an excellent countermeasures against electromagnetic interference (EMI) and provide high attenuation over a wide band frequency from 5 to 1000MHz.

Features

Filters for the capacitance range at 10 to 100,000 pF are also available, please consult "JANTEK" details.

Operating temperature range : -25°C ~ +85°C

Rated voltage : 50 VDC

Insulation resistance : 5,000 M Ω min


Product identification

Product Identification


BC - 104 Z

Type Inductance Tolerance

General Characteristics

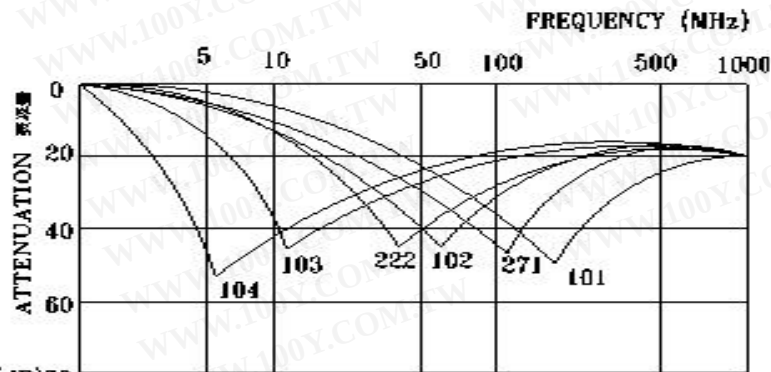


EMI FILTER CURVE (dB)

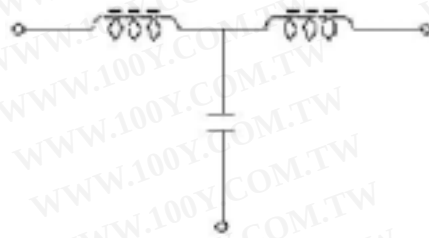

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EMI FILTER Circuitry

Shape

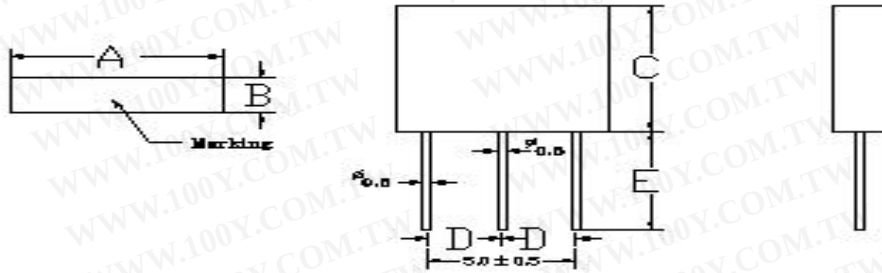

Dimension

A	B	C	D	E
7.3 Max (mm)	2.5 Max (mm)	7.0 Max (mm)	2.5 Max (mm)	8.0 Max (mm)

Series

Part	Rated voltage	Capacitance (PF)	Current Between	Examples Indication
BC-470K-B	50 V	47	6A (Max)	470 K
BC-101K-B	50 V	100	6A (Max)	101 K
BC-271K-B	50 V	270	6A (Max)	271 K
BC-102K-B	50 V	1,000	6A (Max)	102 K
BC-222M-B	50 V	2,200	6A (Max)	222 M
BC-103M-B	50 V	10,000	6A (Max)	103 M
BC-223M-B	50 V	22,000	6A (Max)	223 M
BC-473M-B	50 V	47,000	6A (Max)	473 M
BC-104Z-B	50 V	100,000	6A (Max)	104 Z