


N-C-J-4 N 公頭壓接 50-4/LMR240 等線纜 N-C-J240 射頻連接器

L16-J-4



N Male Crimp Connector For 50-4/LMR240 Cable

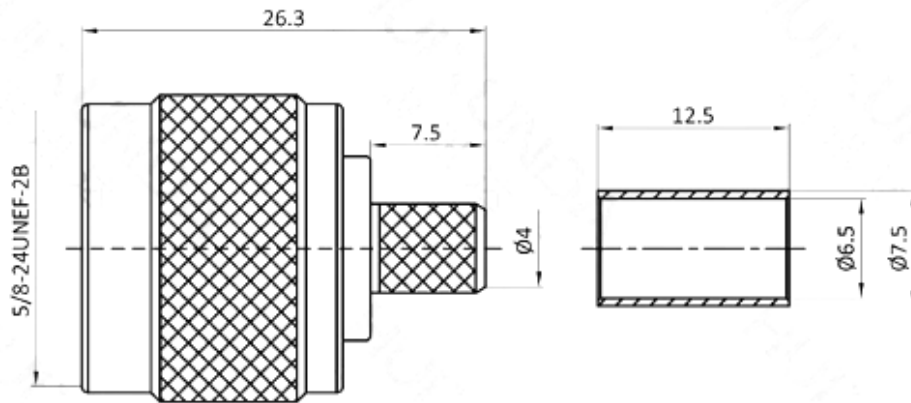

Interface 界面

According to 根据

IEC 60169-16

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-6GHz

VSWR 电压驻波比

≤ 1.25

Dielectric Withstanding Voltage 介质耐压

$\geq 2500V$ RMS,50hz,at sea level

Dielectric Resistance 介电常数

$\geq 5000M\Omega$

Contact Resistance 接触电阻

Center Contact 中心 $\leq 1m\Omega$

Outer Contact 外部 $\leq 1m\Omega$

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

$-45^{\circ}C \sim +125^{\circ}C$

Durability 耐久性

≥ 500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Ni 镍
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金
Connection sleeve 螺套	Brass 黄铜	Ni 镍