


N-JK-2W6G 隔直器 N 直流隔斷器 DC-BLOCK N-JK 公母頻率 0.1-6G

N Male To Female 2W 6G DC-BLOCK Connector

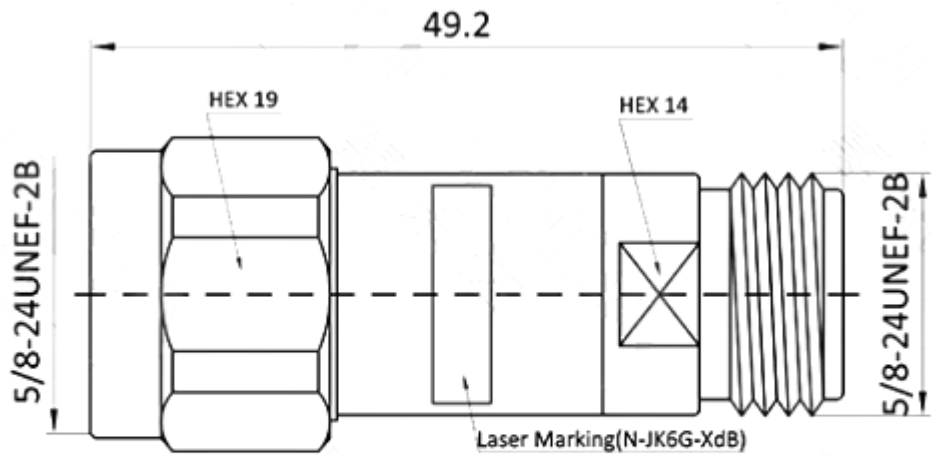

Interface 界面		
According to 根据	IEC60169-16	
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	0.1-6GHz	
VSWR 电压驻波比	≤1.2	
Insertion Loss 插入损耗	≤0.2dB	
DC Maximum Voltage DC 最大电压	50V	
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-55°C ~ +125°C	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Ni 镍
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金
Connection sleeve 螺套	Brass 黄铜	Ni 镍