RPSMA-C-KY-1.5

1 SMA外螺内针
2 匹配RG316/RG174等线缆



RPSMA-C-J-3

1 SMA内螺内孔
2 匹配RG142/RG58/SYV50-3等线缆



RPSMA-C-J-1.5

1 SMA内螺内孔
2 匹配RG316/RG174等线缆



SMA-C-KY-3

1 SMA母头
2 匹配SYV50-3、RG142等线缆



SMA-C-J-3

1 SMA公头
2 匹配RG142DB/SYV50-3/RG58线缆



SMA-C-JW-1.5

1 SMA公头（内螺纹内针）
2 接50-1.5馈线



SMA-C-J-1.5

1 SMA公头

2 匹配RG316/RG174等线缆




产品规格书


PRODUCT SPECIFICATION

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。


1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4 Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG316.RG174

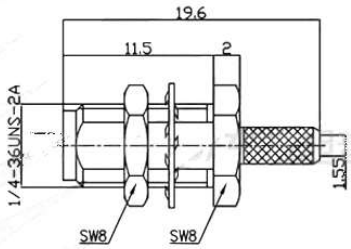



Recommended stripping size
推荐剥线尺寸



Recommend mounting hole
建议安装孔

产品型号P/N: RPSMA-C-KY-1.5


产品规格书


PRODUCT SPECIFICATION

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.2
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG316.RG174

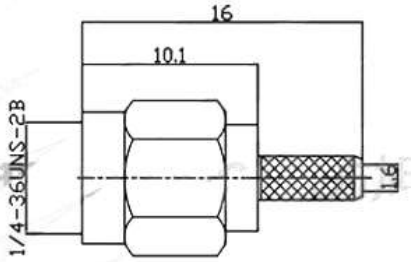



推荐剥线尺寸
Recommended stripping size


产品型号P/N: SMA-C-J-1.5


产品规格书
PRODUCT SPECIFICATION

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.2
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG316.RG174

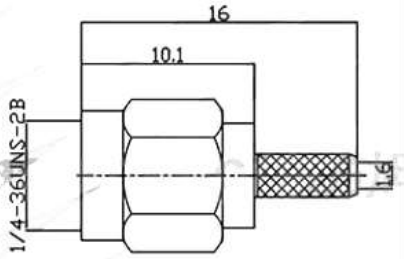



推荐剥线尺寸
Recommended stripping size


产品型号P/N: RPSMA-C-J-1.5


产品规格书

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG142.RG58.SYV50-3

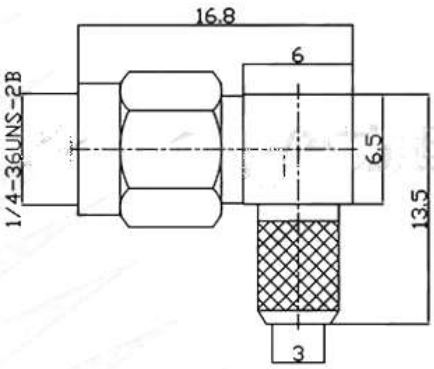



推荐剥线尺寸
Recommended stripping size


产品型号P/N: SMA-C-JW-3


产品规格书

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3MΩ
1.6 Outer contart resistance/外部接触电阻	≤2MΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG316.RG174

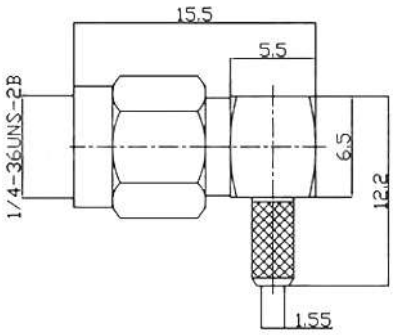



推荐剥线尺寸
Recommended stripping size


产品型号P/N: SMA-C-JW-1.5


产品规格书
PRODUCT SPECIFICATION

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles
3 Material and Plating/材料和电镀	
3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金	
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金	
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯	

Suitable cables/适配电缆: RG142.RG58.SYV50-3

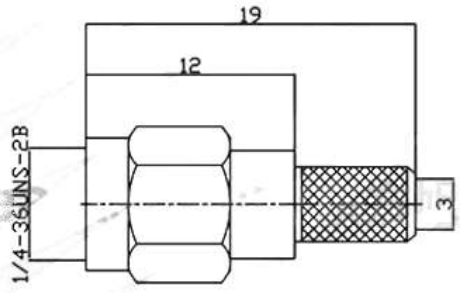



推荐剥线尺寸
Recommended stripping size

产品型号P/N: RPSMA-C-J-3


产品规格书


This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3MΩ
1.6 Outer contart resistance/外部接触电阻	≤2MΩ
1.7 Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles

3 Material and Plating/材料和电镀
3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯

Suitable cables/适配电缆: RG142.RG58.SYV50-3

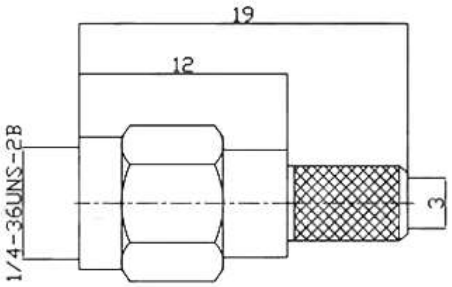

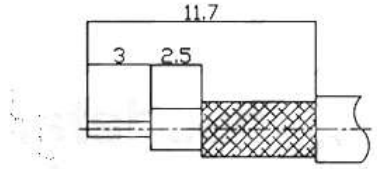

推荐剥线尺寸
Recommended stripping size

产品型号P/N: SMA-C-J-3


产品规格书
PRODUCT SPECIFICATION


This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气	
1.1 Impedance /阻抗	50Ω
1.2 Frequency /频率	DC-6GHz
1.3 VSWR/驻波	≤1.25
1.4 Dielectric withstanding voltage /介质耐压	1000V(rms)
1.5 Center contar resistance /中心接触电阻	≤3mΩ
1.6 Outer contart resistance/外部接触电阻	≤2mΩ
1.7Insulation resistance/绝缘电阻	≥5000MΩ
2 Environmenta &Mechanical/环境与机械	
2.1 Temperture range/温度范围	-45°~+125°
2.2 Rohs Compliant/符合RoHS	
2.3 Durability/耐久性	500cycles


3 Material and Plating/材料和电镀
3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金
3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
3.3 Insulators/绝缘体： PTFE/聚四氟乙烯

Suitable cables/适配电缆: RG142.SYV50-3.RG58

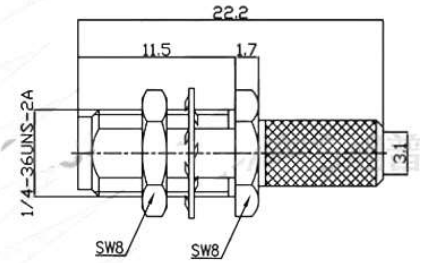



Recommended stripping size
推荐剥线尺寸



Recommend mounting hole
建议安装孔

产品型号P/N: SMA-C-KY-3