
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
AJ	17

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G1	REVISED PER ECO-11-005030	11MAR11	RK	HMR

1. USE INSTRUCTION SHEET 408-2187.
2. ACCOMIDATES 0.79 [.031] TO 4.78 [.188] PANEL THICKNESS.

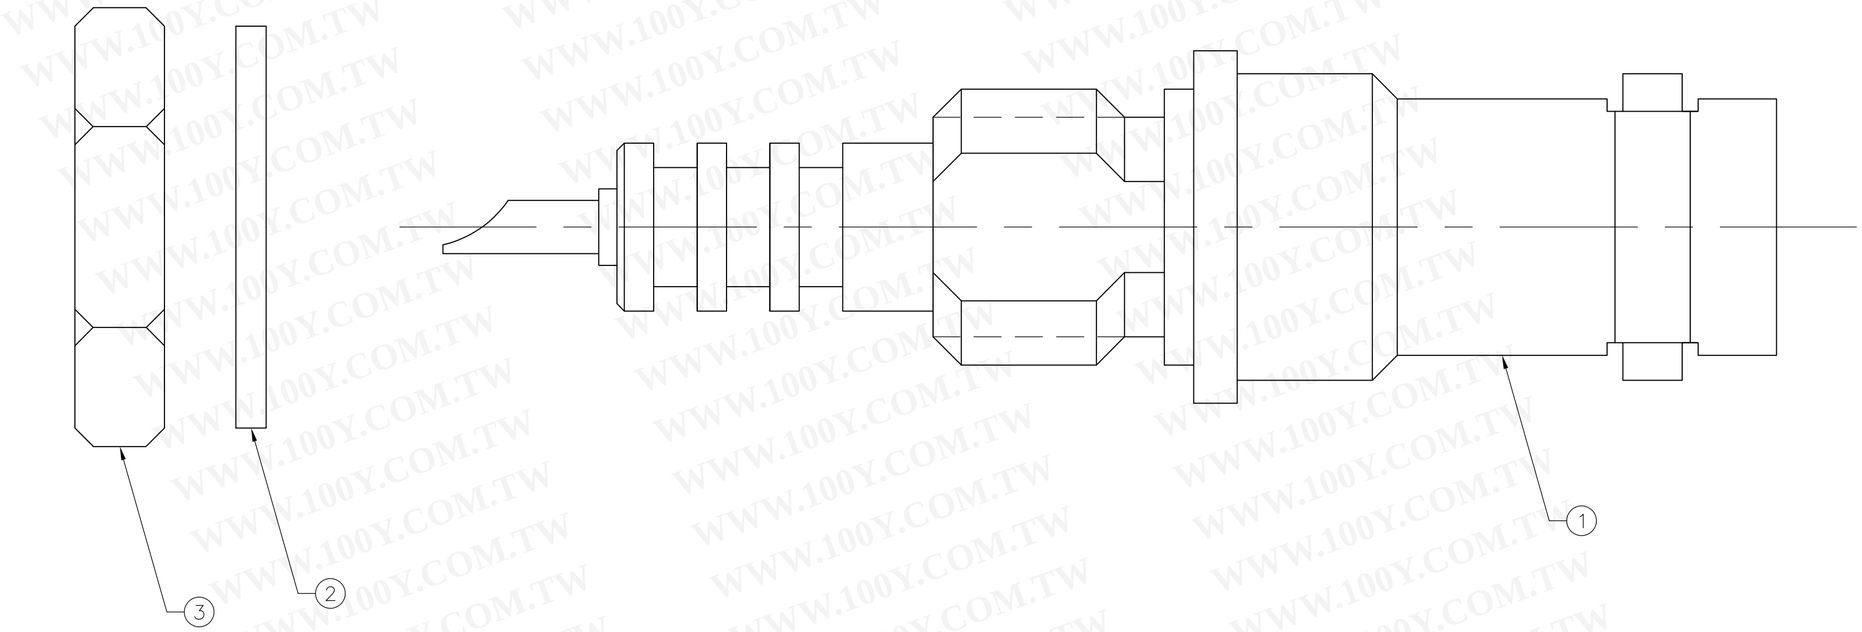

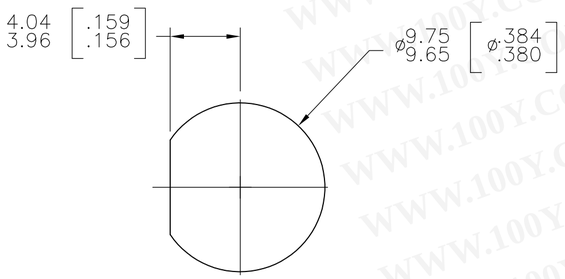

RECOMMENDED PANED CUTOUT
SCALE 4:1

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

.461 oz	1-330249-1	1-329492-1	51531-2	51494-2
.423 oz	9-330249-0	9-329492-0	9-51531-0	51494-1
WEIGHT	③ JAM NUT QTY: 1	② LOCK WASHER QTY: 1	① JACK ASSEMBLY QTY: 1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.41[.016]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN D.WALLACE 08JAN08
CHK J. LIPPERT 08JAN08
APVD J. LIPPERT 08JAN08
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME SHV BULKHEAD SOLDER JACK

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-51494	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV G1

51494

1471-9 (3/11)