

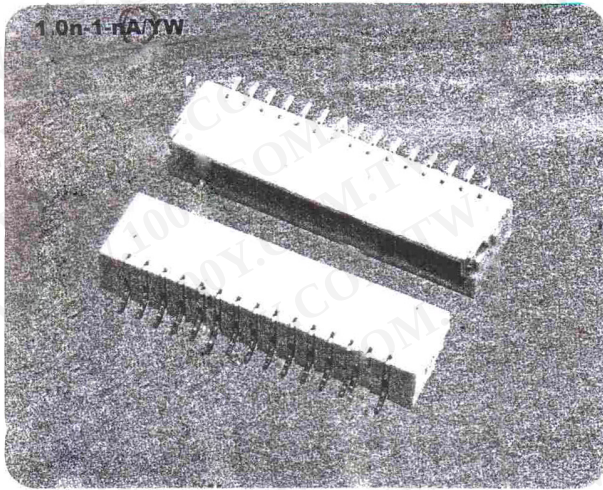








## 1.0n-1-nA



P.C.B Layout

## 1.0n-1-YW



A=1.0X (n-1)  
 B1=A+0.3  
 B2=1.0Xn+0.3



## SPECIFICATIONS

Poles: 2 to 15

Applicable wire: AWG#30

Voltage rating(MAX): 50V DC/AC(rms)

Current rating: 0.5A

Working Temperature: -20°C to +85°C

Insulation resistance: ≥ 500MΩ

Contact resistance: ≤ 30MΩ

## MATERIAL

Contact: Phosphor Bronze Tin-plated

Solder tab: Phosphor Bronze Tin-plated

Terminal: Phosphor Bronze, Tin-plated

Wafer: PA46(UL94V-0)

Housing: PA46(UL94V-0)

## PACKAGE

Tape and Reel Package

Pipe Package

Bag Package

| Poles | A    | B    |
|-------|------|------|
| 2     | 1.0  | 4.0  |
| 3     | 2.0  | 5.0  |
| 4     | 3.0  | 6.0  |
| 5     | 4.0  | 7.0  |
| 6     | 5.0  | 8.0  |
| 7     | 6.0  | 9.0  |
| 8     | 7.0  | 10.0 |
| 9     | 8.0  | 11.0 |
| 10    | 9.0  | 12.0 |
| 11    | 10.0 | 13.0 |
| 12    | 11.0 | 14.0 |
| 13    | 12.0 | 15.0 |
| 14    | 13.0 | 16.0 |
| 15    | 14.0 | 17.0 |
| 16    | 15.0 | 18.0 |
| 17    | 16.0 | 19.0 |
| 18    | 17.0 | 20.0 |
| 19    | 18.0 | 21.0 |
| 20    | 19.0 | 22.0 |