


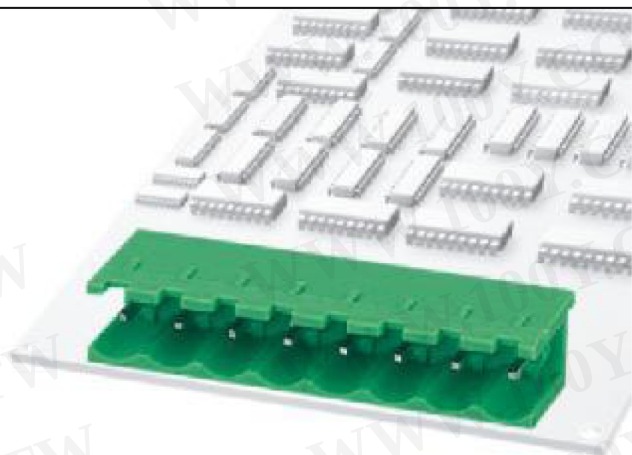




2EDGR-5.0
2EDGR-5.08

认 证	 	
电气性能		
参考标准	UL	IEC
额定电压	300V	320V
额定电流	15A	20A
耐电压	AC2500V/1Min	
机械性能		
温度范围	-40℃~+105℃	
尺 寸		
间 距	5.08mm(.200")	
极 数	2P-24P	
材质和电镀		
塑 件	PA66,UL94 V-0	
焊 针	黄铜 镀锡	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

订购方式:

<input type="text"/>	-	<input type="text"/> <input type="text"/>	P	-	<input type="text"/> <input type="text"/>	-	<input type="text"/> <input type="text"/> <input type="text"/>
							客 户 需 求
型号							
			极数				
			1 单倍间距				颜色
			2 双倍间距				1 灰色 4 绿色 7 透色
							2 蓝色 5 橙色 8 黄色
							3 黑色 6 红色 9 白色

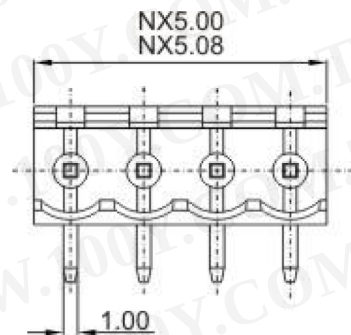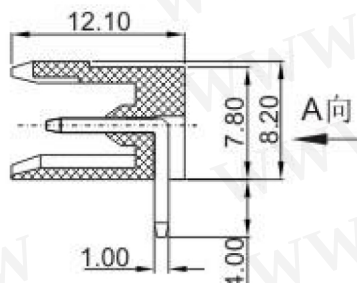

mm (INCH)		
THROANGLE PROJECTION	NAME	
	2EDGR-5.0	2EDGR-5.08