勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

FOR-1351 Rev.1.0

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



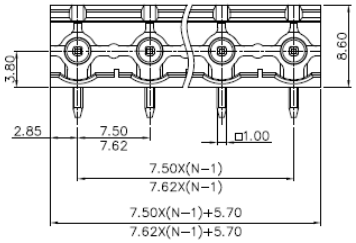



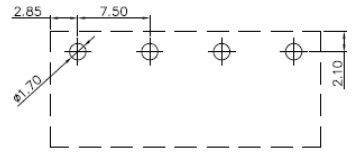

PCB LAYOUT

NOTES1:
UL Standard
1.Rated Voltage/Current : 300V / 15A
2.Withstanding Voltage : AC1600V/1Min.
IEC Standard
1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.50/7.62mm, Poles : N=02~12P
3.Operating temperature: -40℃~+105℃
4.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm									
	Over	Over		Over	Over	Over	Over	Over				
	6	10		30	60	100	150					
TO	TO	TO	TO	TO	TO	TO						
6	10	24	30	60	100	150						
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	0.1/10	∠	±2°		

5.RoHS Compliance

2EDGR - 7.5/7.62 - XXP - 1Y -00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) (RoHS) 00A-(Standard)

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS	PART NO.: /			
	APPD: /	NAME: 2EDGR-7.5/7.62-XXP-1Y-100A(H)		
	CHKD: /			
	DRFT: /	TITLE: CUSTOMER DRAWING	REV	D0
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET	1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1