


2EDGRC-5.0/5.08



订购方式：

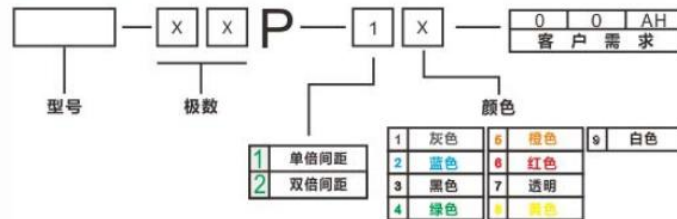

项 目 (Item)	数 据 (Data)		
认证(APPROVAL)	 		
测试标准(Test standard)	IEC/EN61984 : 2009 / UL1059		
产品间距(Pitch) [mm]	5.0/5.08		
极数(Poles)	2-24P		
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40022408		
额定电压(Rated voltage) [V]	320		
额定电流(Rated current) [A]	20		
额定连接容量(Rated connection capacity)(solid/stranded) [mm ²]	/		
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	III/2/I		
额定冲击电压(Rated impulse voltage) [KV]	4.0		
额定扭矩(Rated torque) [N·m]	/		
UL1059测试数据 (UL1059Test data)	UL File Number E228872		
应用组别(Use group)	B	C	D
额定电压(Rated voltage) [V]	300	/	300
额定电流(Rated current) [A]	15	/	10
额定连接容量(Rated connection capacity) (solid/stranded) [AWG]	/		
额定扭矩 (Rated torque) [Lb. in]	/		
通用数据(General data)	/		
剥线长度(Stripping length) [mm]	/		
螺丝(Screw)	/		
阻燃等级(Inflammability class)UL94	V-0		

环境温度(Ambient temperature) [°C]	-40~+105
相对湿度(Relative humidity)	5%-95%
抽样检验标准(Inspection standard)	MIL-STD-105E II
允收水准(AQL)	0.65
保质期(Warranty)	12 months
材质和电镀(Material and plating)	/
绝缘材质(Housing)	PA66
触点材料(Contact)	Copper alloy , Sn plated铜合金, 镀锡

