


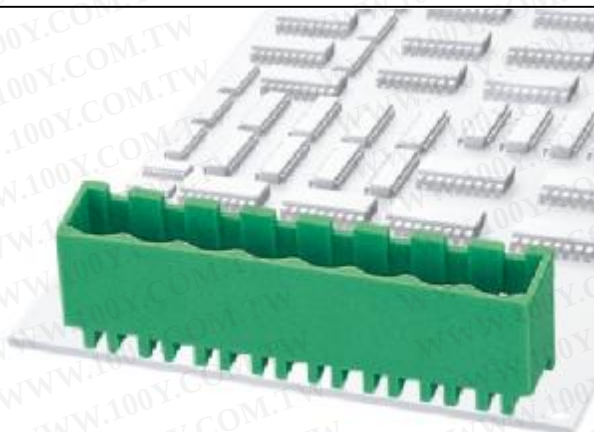


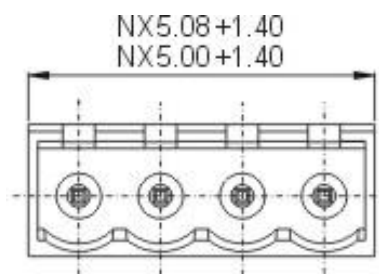


Product Specification

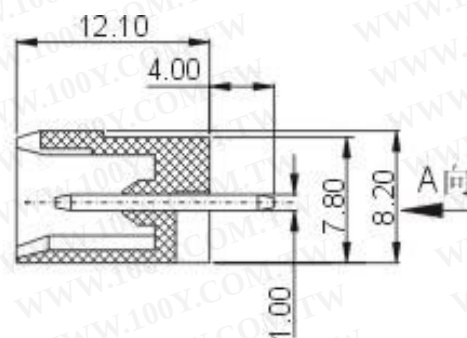

2EDGVC-5.0
2EDGVC-5.08

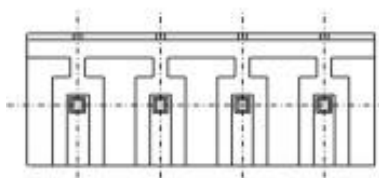

A向视图



PCB LAYOUT

APPROVAL



Electrical

Standard

UL

IEC

Rated voltage

300V

320V

Rated current

15A

20A

Withstanding voltage

AC2500V/1Min

Mechanical

Ambient temperature

-40℃~+105℃

Dimensions

Pitch

5.0mm(.197") 5.08mm(.200")

Poles

2P-24P

Material

Housing

PA66,UL94 V-0

Pin header

Brass,Tin-plated


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

HOW TO ORDER :

	-		P	-	1		X	X	X		
							Customer Request				
							Color				
						1	Single pitch	4	Green	7	Trans Parent
						2	Double pitch	5	Orange	8	Yellow
								6	Red	9	White

Series number

No.of pole



NAME

2EDGVC-5.0 2EDGVC-5.08