

RoHS Compliant

Customer Drawing

REV.

ECN NO.

DESCRIPTION

DATE

DESIGN

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

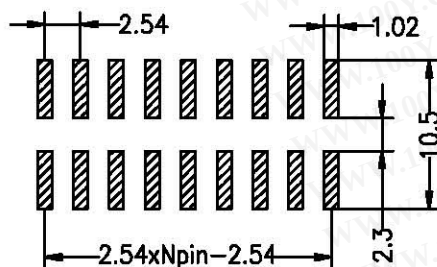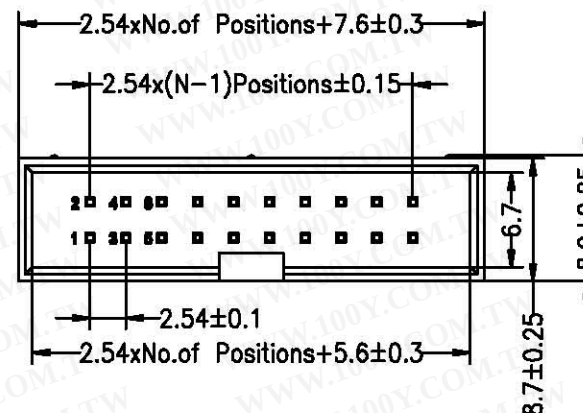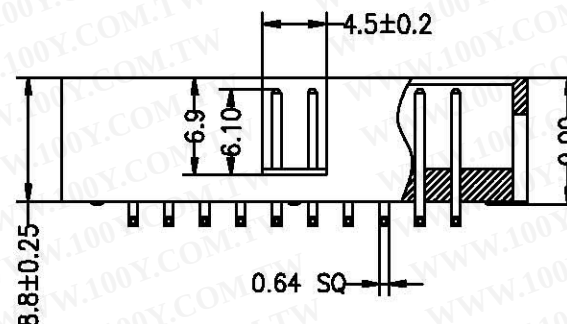

公差一覽表

TOLERANCE UNLESS OTHERWISE

X.	±0.35	X°.	±5°	單位 UNIT	mm	制圖 DRAWING	產品名稱 NAME
.X	±0.30	.X°.	±2°	公差 TOL	1:1	設計 DESIGN	2.54PH 筒牛
.XX	±0.25	.XX°.	±1°	比例 SCALE	1:1	審核 CHECK	產品料號 PART NO.
.XXX	±0.02	.XXX°.	±0.5°	日期 DATE	2017.08.1	核准 APPD	圖號 DRAW NO.