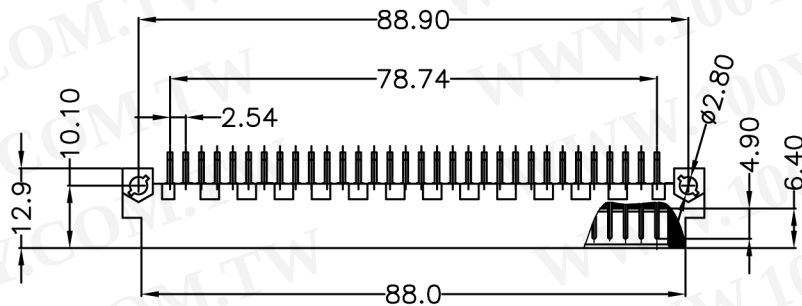

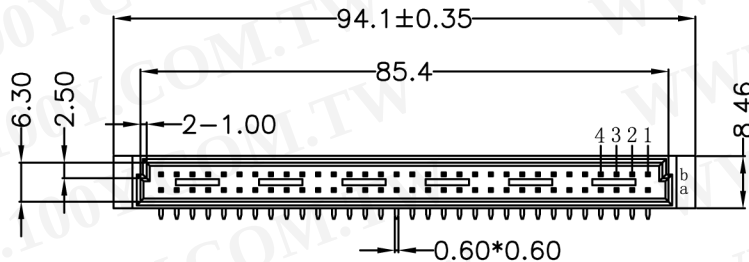
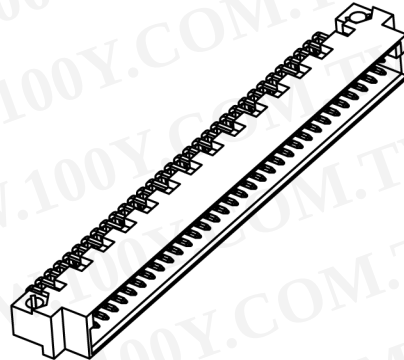


PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATION

MATERIAL

Housing:PBT+5%PC UL94V-0

Contacts:Brass

CONTACT PLATING

G=GOLD FLASH PLATED ALL OVER,Ni UNDER PLATED ALL OVER.

T=TIN PLATED ALL OVER,Ni UNDER PLATED ALL OVER.

S=GOLD FLASH PLATED ON CONTACT AREA,TIN

PLATED ON SOLDER TAIL,Ni UNDER PLATED ALL OVER.

A=5u"(Selective)

R=3u"(Selective)

B=10u"(Selective)

P=8u"(Selective)

C=15u"(Selective)

E=2u"(Semi-Gold Matte Tin)

D=30u"(Selective)

F=3u"(Semi-Gold Matte Tin)

V=1u"(Selective)

U=5u"(Semi-Gold Matte Tin)

N=3u"(Gold)

ELECTRICAL

Current rating: 2 Amps .

Contact resistance: 20 mohms initial

Insulation resistance: 100000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

Part no. A01 A - 064 M X R D A E X
 1 2 3 4 5 6 7 8 9 10

1. SERIES NO.

2. TYPE:

A=Standard

3. CONTACT NUMBER

4. CONTACT TYPE:

M=Male

5. CONTACT AREA PLATING:

SEE SPECIFICATION

6. FUNCTION OPTION:

R=Right angle

7. PROCESS OPTION:

D=2*32 Housing (Male=90°
Female=180°)

8. ROW SPACING:

A=2.54mm(a+b)

9. CONTACT LENGTH:

E=3.0mm(Right angle only)

10. INSULATOR COLOR:

5=BEIGE

A=Champagne

公差一覽表				nextion® CONNECTOR					
TOLERANCE UNLESS OTHERWISE				單位 UNITS	mm	制圖 DRAWING	姚登攀	產品名稱 TITLE	歐式插座 264 A2型 90度 公座
X.	±0.25	X°.	±5°	角法 VIEW		設計 DESIGN	姚登攀	產品料號 PART NO.	A01A-064MXRDAEX
.XX	±0.20	.X°.	±2°	比例 SCALE	1:1	審核 CHECK		圖號 DRAW NO.	A01A-064MXRDAEX-A0
.XXX	±0.15	.XX°.	±1°	日期 DATE	2009.04.22	核准 APPD			
.XXX	±0.02	.XXX°.	±0.5°						