

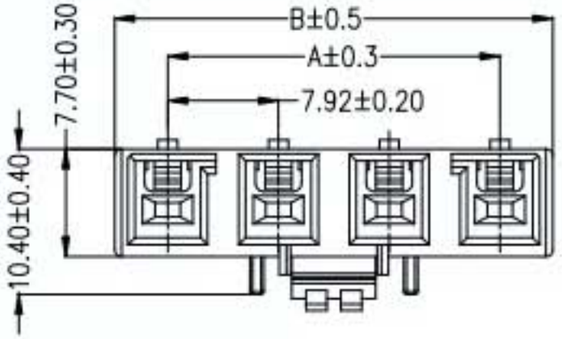


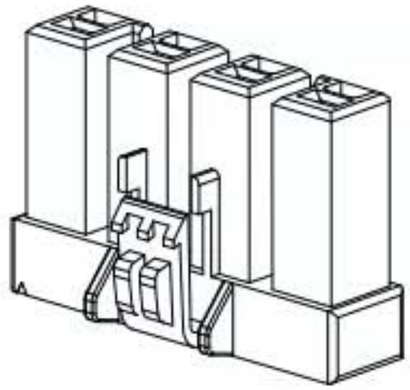



P/N LEGEND


A7925	H-XP	R	N	N	NP	N	00	G
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Series No.
② Connector type: H=Housing
③ No. of circuits
④ R=RoHs
⑤ Material: N=Nylon66-V0, NO FLAME
⑥ Color: N=Natural
⑦ Plating code: NP=Non-plating
⑧ Plating code: N=Non-plating
⑨ Option code: 00=Standard
⑩ Packing code: G=Bag




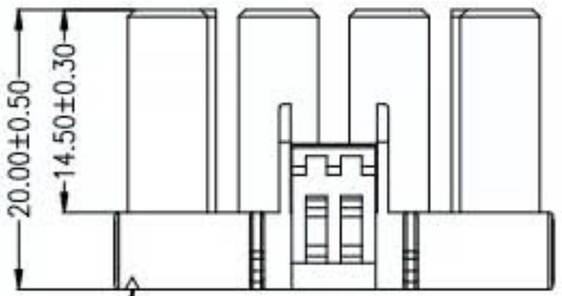



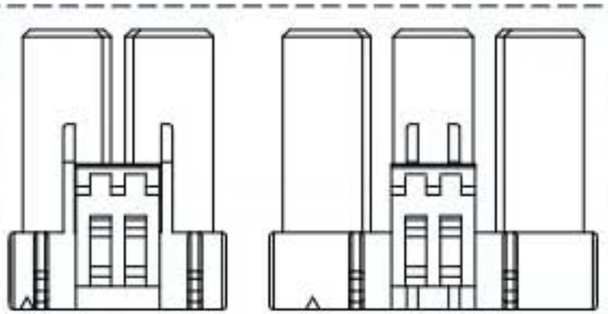

02PIN 03PIN

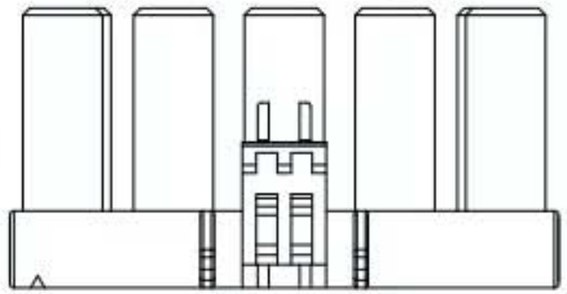


05PIN


SPECIFICATIONS
Current Rating: 13A~30A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -55°C ~ +85°C
Contact Resistance: 5mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2500V AC/minute

Circuit No.	Dimensions A	B
02P	7.92	15.50
03P	15.84	23.42
04P	23.76	31.34
05P	31.68	39.26

POLARIZATION MARK

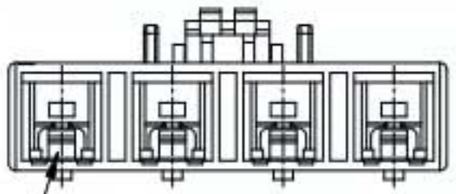

Circuit 1

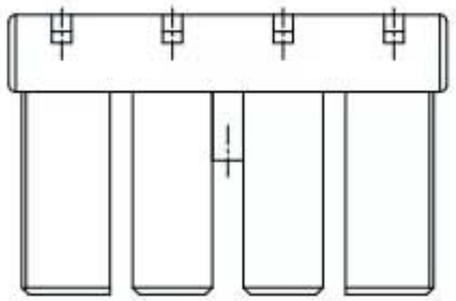

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

REV.	DESCRIPTION	DATE	NAME
A0	NEW RELEASE	2021.12.02	郭小姐

UNIT	SCALE	SHEET
mm	1 : 1	1 of 1

DRAWN BY	APPROVED BY
徐富水 2021.12.02	徐富水 2021.12.02

GENERAL TOLERANCE
X.X±0.25
X.XX±0.15
X.XXX±0.05
ANGLE±

TITLE:
7.92mm PITCH HOUSING
STANDARD TYPE

DRAW NO.: A7925H-XPRXXXXX00G
REV. A0