
勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

standard female 2 row — body style B

dimensions
In mm (Inches)

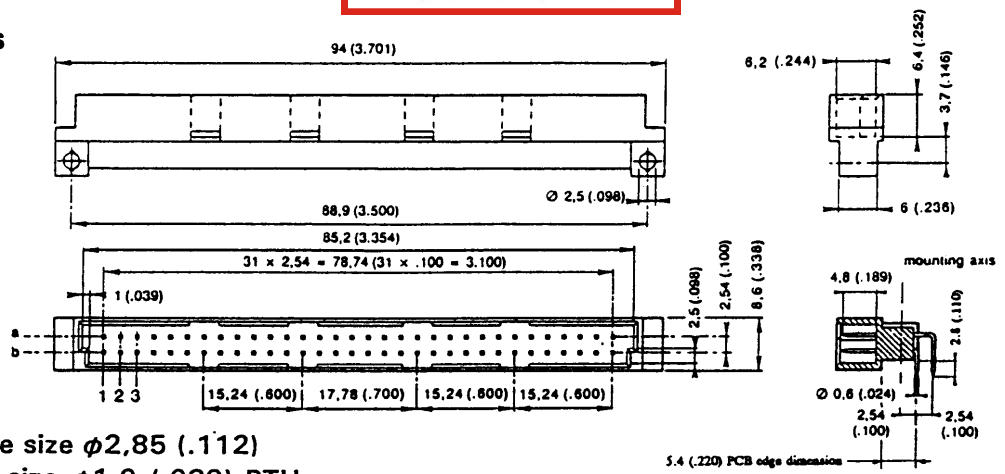

PCB drilling :


mounting hole size ϕ2,85 (.112)
contact hole size ϕ1,0 (.039) PTH
or ϕ0,85 (.033) PTH

either size acceptable

standard termination

standard male 2 row — body style B

dimensions
In mm (Inches)

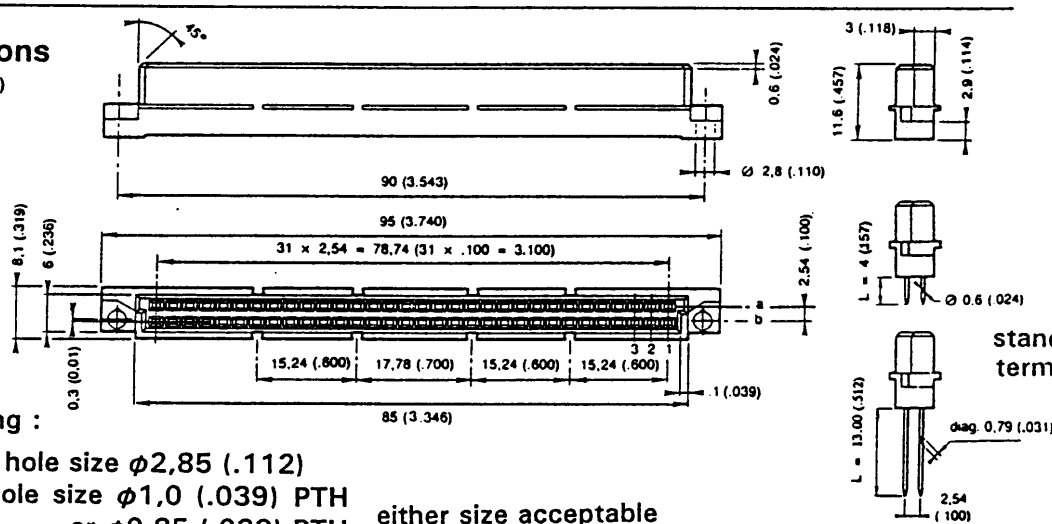

standard terminations

PCB drilling :

mounting hole size ϕ2,85 (.112)
contact hole size ϕ1,0 (.039) PTH
or ϕ0,85 (.033) PTH

either size acceptable

eurocard connectors — connector characteristics


insulation resistance	$\geq 10^6 M\Omega$	contact material male	brass
contact resistance	$\leq$ 15mΩ	contact material female	phospher bronze
voltage proof	1000V dc or ac	contact plating in active area	gold over nickel
nominal voltage	330 Vac, 470 Vdc	contact plating on pc tails	tin over nickel
current rating	2A max @ 20°C	plating offered : class 1	class 2 class 3
temperature range	-65°C to 125°C	insulator material	PBT polyester

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

standard female 3 row — body style C

dimensions

in mm (inches)

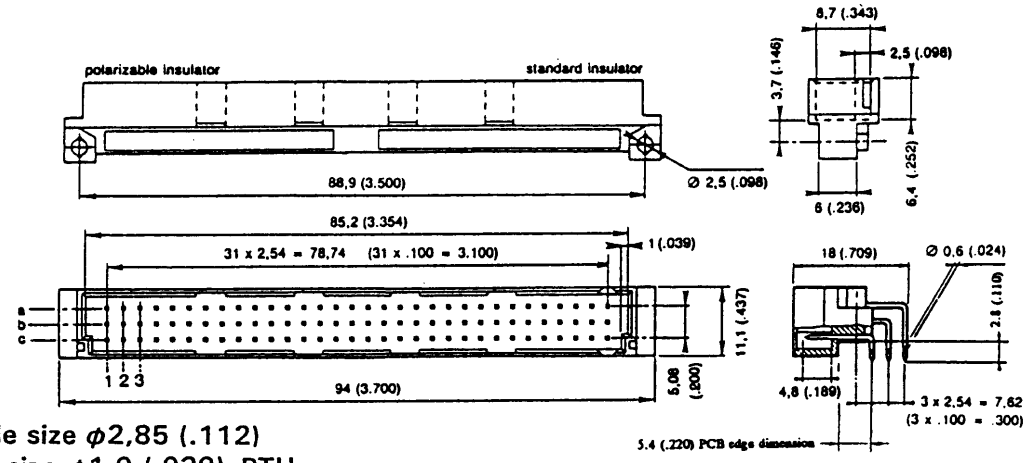

PCB drilling :

mounting hole size ϕ2,85 (.112)
contact hole size ϕ1,0 (.039) PTH
or ϕ0,85 (.033) PTH


either size acceptable

standard termination

standard male 3 row — body style C

dimensions

in mm (inches)

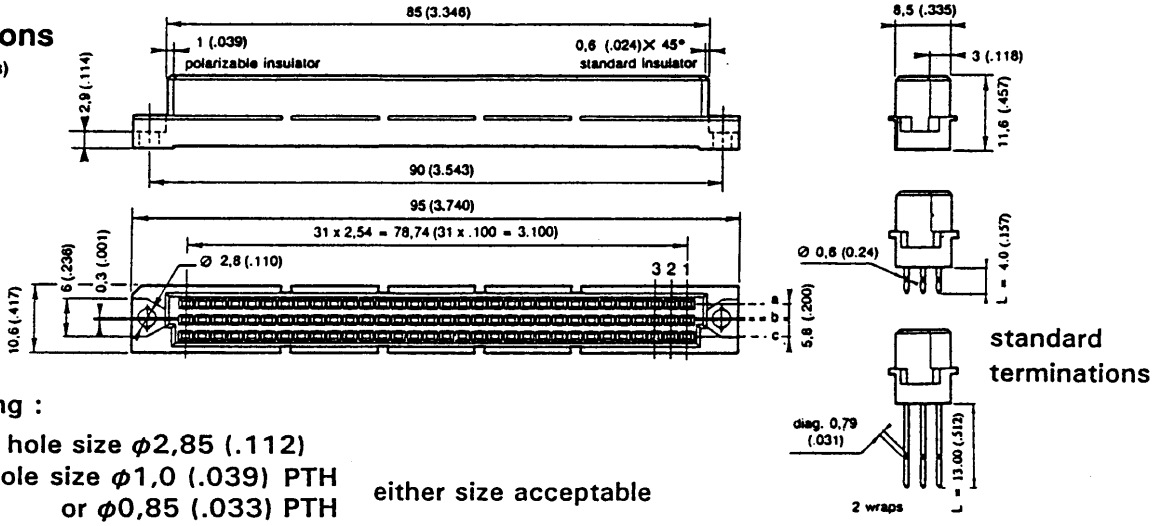

PCB drilling :

mounting hole size ϕ2,85 (.112)
contact hole size ϕ1,0 (.039) PTH
or ϕ0,85 (.033) PTH

either size acceptable

eurocard connectors — connector characteristics

insulation resistance	≥ 10^6 MΩ	contact material male	brass
contact resistance	≤ 15mΩ	contact material female	phospher bronze
voltage proof	1000V dc or ac	contact plating in active area	gold over nickel
nominal voltage	330 Vac, 470 Vdc	contact plating on pc tails	tin over nickel
current rating	2A max @ 20°C	plating offered : class 1	class 2 class 3
temperature range	-65°C to 125°C	insulator material	PBT polyester