

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATION

MATERIAL

Housing:PBT.+30% GLASS FILLED UL94V-0

Contacts:PHOSPHOR BRONZE

CONTACT PLATING

S=GOLD FLASH PLATED ON CONTACT AREA,TIN PLATED ON SOLDER TAIL,Ni UNDER PLATED ALL OVER.

T=TIN PLATED LATED ALL OVER,

Ni UNDER PLATED ALL OVER.

ELECTRICAL

Current rating: 1 Amps .

Contact resistance: 20 mohms initial








Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC / minute

Operating temperature: -55° C TO +100° C

Part no. B03 A - XXX P X X A X X
 1 2 3 4 5 6 7 8 9 10

- | | |
|---|---|
| 1. SERIES NO. | 7. BODY OPTION: |
| 2. TYPE:
A=Standard | A=W/BAR |
| 3. CONTACT NUMBER | 8. CONTACT OPTION:
A=STANDARD |
| 4. CONTACT TYPE:
P=Non Distribution | 9. PROCESS OPTION:
0=NO MARK
1=MARK "noxtlon" |
| 5. CONTACT AREA PLATING:
SEE SPECIFICATION | 10. INSULATOR COLOR:
3=BLACK
4=GRAY |
| 6. PARTS OPTION:
A=W/O STRAIN RELIEF
B=W/ STRAIN RELIEF | |

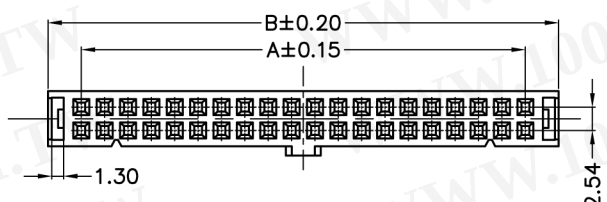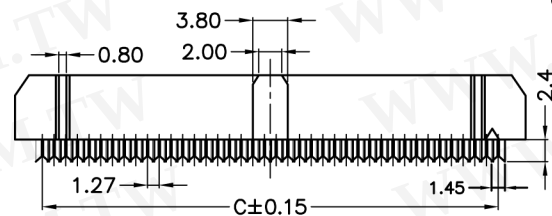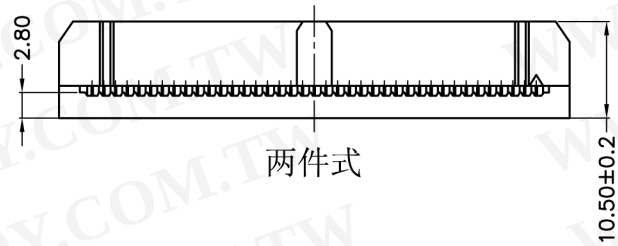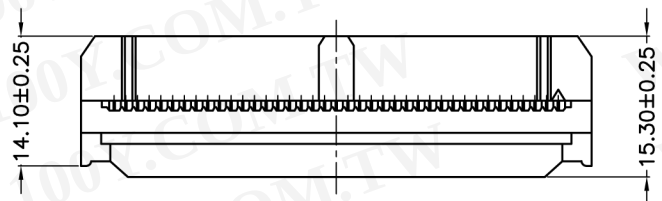

ITEM	PART NO.	CKT SIZE	A	B	C	ITEM	PART NO.	CKT SIZE	A	B	C
1	B03A-010PXXAA0X	10	10.16	17.33	11.43	7	B03A-034PXXAA0X	34	40.64	47.81	41.91
2	B03A-014PXXAA0X	14	15.24	22.41	16.51	8	B03A-040PXXAA0X	40	48.26	55.43	49.53
3	B03A-016PXXAA0X	16	17.78	24.95	19.05	9	B03A-050PXXAA0X	50	60.96	68.13	62.23
4	B03A-020PXXAA0X	20	22.86	30.03	24.13	10	B03A-060PXXAA0X	60	73.66	80.83	74.93
5	B03A-026PXXAA0X	26	30.48	37.65	31.75	11	B03A-064PXXAA0X	64	78.74	85.91	80.01
6	B03A-030PXXAA0X	30	35.56	42.73	36.83						

公差一览表 TOLERANCE UNLESS OTHERWISE				nextion® CONNECTOR					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	管正志	产品名称 TITLE	I. D. C. SOCKET
.X	±0.20	.X°.	±2°	角法 VIEW		设计 DESIGN	管正志	产品料号 PART NO.	B03A-XXXXPXXAAXX
.XX	±0.15	.XX°.	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	B03A-XXXXPXXAAXX-A0
.XXX	±0.02	.XXX°.	±0.5°	日期 DATE	2009.12.22	版本 VER	A0	核准 APPD	