

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

特性:Specifications:

电器:Electrical:

接触阻抗>Contact Resistance

30 milliohms MAX

耐电压:Dielectric Withstanding Voltage:

500V AC AT Sea Level

绝缘阻抗:Insulation Resistance:

100 MEGA ohms MIN

材料:Material:

塑胶:PBT

端子>Contact:Copper Alloy C2680H

铜壳/铁壳:Shell: Copper Alloy C2680H/Spcc

电镀:Finish:

端子>Contact: Plated Gold in Mating Area;



Tin/ On Solder Tails

接触点镀金,脚镀锡

铜壳/铁壳:Shell:

Nickel Plating

镀镍

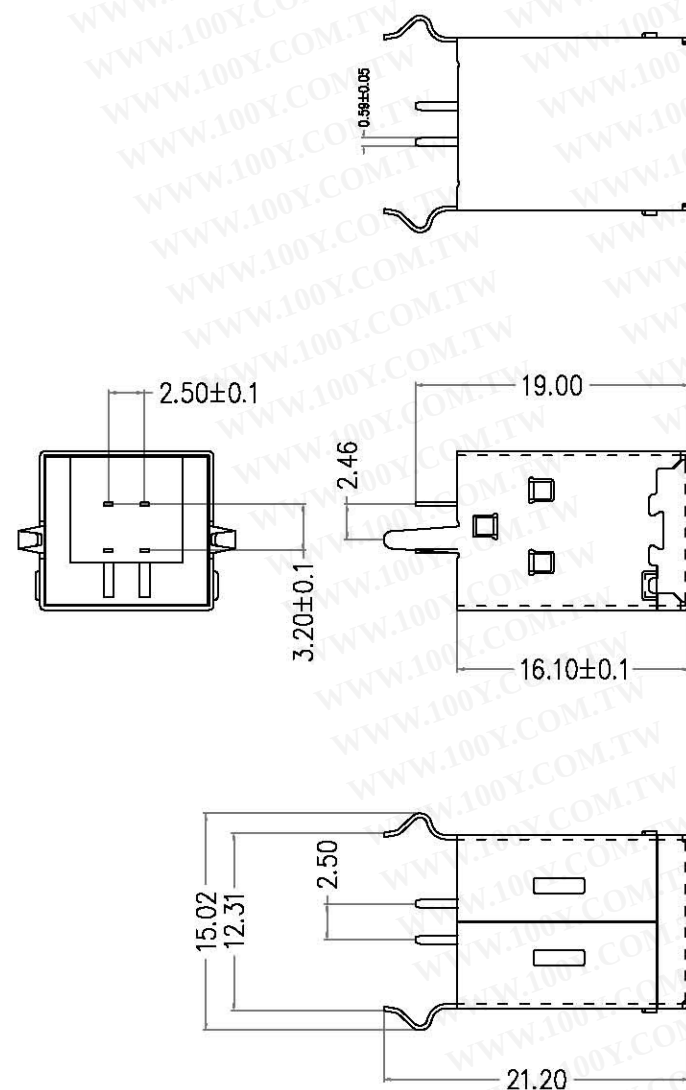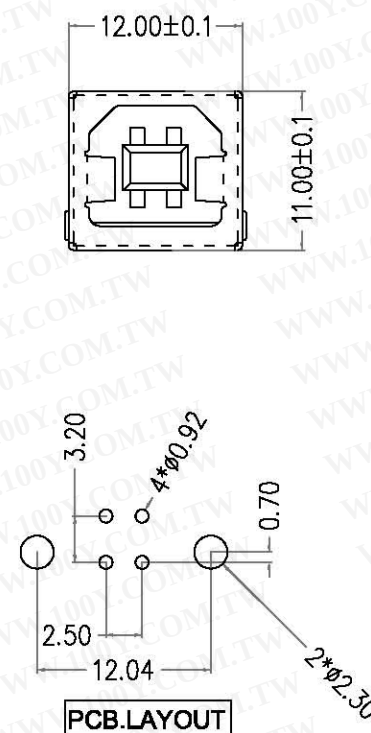

TOLERANCE UNLESS OTHERWISE SPECIFIED		UNLESS SPECIFIED						
XXX	±0.10	DRAM NO	KCD	DATE	DRAW NAME			
XX	±0.20	DWN	林云	09.07.20	USB BF 180度 白胶 铁壳			
X	±0.30	CHK						
X'	±2'	APVD			P/N:			
		FINISH		UNIT	SCALE	WEIGHT	REV	SHEET
		MATERIAL		mm	1:1		A	1 OF 1