


■ 技术参数 SPECIFICATIONS

- 线数 (Poles) : 2~10
- 适用线规 (Applicable wires) : AWG24#~18#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 7A
- 接触电阻 (Contact resistance) : $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 - 孔座 (Housing) : 尼龙 (PA66) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)
 - 黄铜 (Brass Tin/plated)

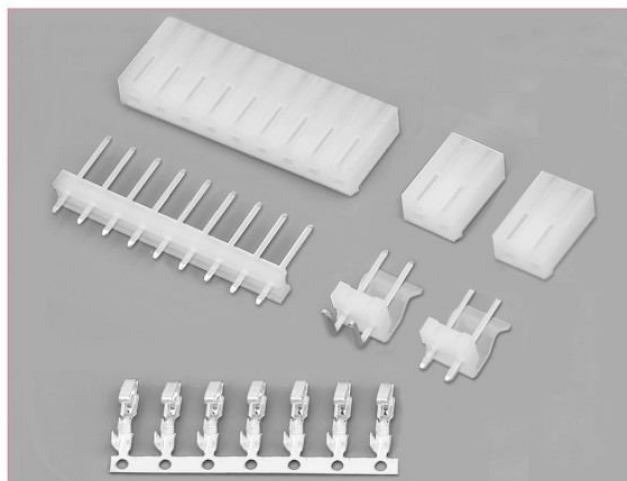


端子 TERMINAL (4018/3.96)


型号 Type	适用线规 Applicable wires	电线外径 O.D of wire ins	材料厚度 Thickness	材料 Material	数量 Quantity
HX39602-PTA	0.2~0.75 mm ² 24~18	1.5~3.0 mm	0.3 mm	黄铜	3000PCS/盘
HX39602-PTB	0.2~0.75 mm ² 24~18	1.5~3.0 mm	0.25 mm	磷铜	4000PCS/盘

HX39602-PT (4018/3.96)


PTB(磷青铜Phos.bronze)




PTA(黄铜Brass)




HX50803-WAP (5282/5.08)

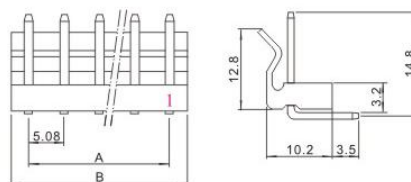


HX50803-WAG (5282/5.08)

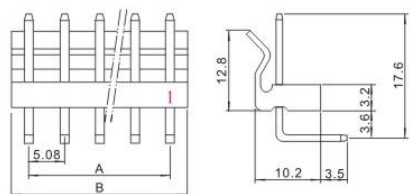


HX50802-Y (5058/5.08)




HX50802-PB (5058/5.08)




HX50803-NA (5279/5.08)

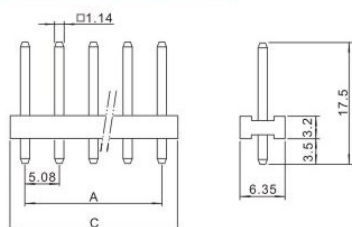

HX50803-A (5281/5.08)

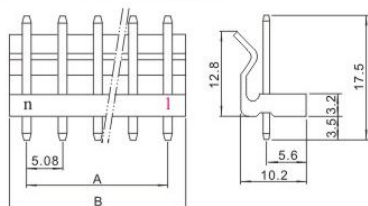

■ 安装尺寸 MOUNTING MEASUREMENT



孔座 HOUSING (5058/5.08)

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	HX50802-2Y/PB	5.08	10.16
3	HX50802-3Y/PB	10.16	15.24
4	HX50802-4Y/PB	15.24	20.32
5	HX50802-5Y/PB	20.32	25.40
6	HX50802-6Y/PB	25.40	30.48
7	HX50802-7Y/PB	30.48	35.56
8	HX50802-8Y/PB	35.56	40.64
9	HX50802-9Y/PB	40.64	45.72
10	HX50802-10Y/PB	45.72	50.8

针座 WAFER (5281/5282/5279/5.08)

线数 Poles	型号 Type		尺寸Dimensions(mm)		
	直式/弯式	横条(180°)	A	B	C
2	HX50803-2A/WA	HX50803-2NA	5.08	10.16	9.08
3	HX50803-3A/WA	HX50803-3NA	10.16	15.24	14.16
4	HX50803-4A/WA	HX50803-4NA	15.24	20.32	19.24
5	HX50803-5A/WA	HX50803-5NA	20.32	25.4	24.32
6	HX50803-6A/WA	HX50803-6NA	25.40	30.48	29.40
7	HX50803-7A/WA	HX50803-7NA	30.48	35.56	34.48
8	HX50803-8A/WA	HX50803-8NA	35.56	40.64	39.56
9	HX50803-9A/WA	HX50803-9NA	40.64	45.72	44.64
10	HX50803-10A/WA	HX50803-10NA	45.72	50.8	49.72