

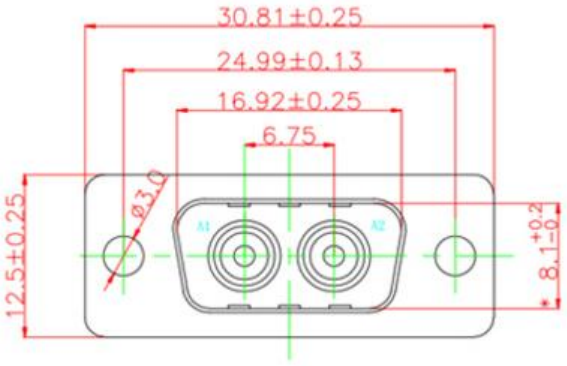


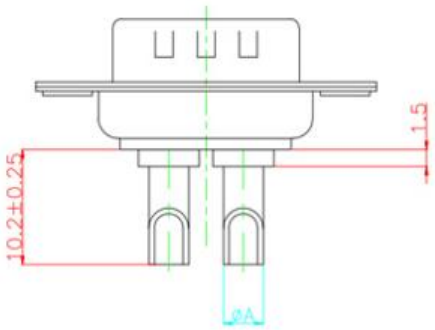

PO(X)	A	B	WIRE	CURRENTRATING(A)
001	2.5	4.5	14#~16#	10
002	3.6	5.0	10#~12#	20
003	4.4	5.5	8#~10#	30
004	5.5	5.5	6#~8#	40



MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC,

HIGH POWER CONTACT MATERIAL: BRASS, 3U"~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,30,OR 40 AMPS

HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE :

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : −55°C ~ +125°C