


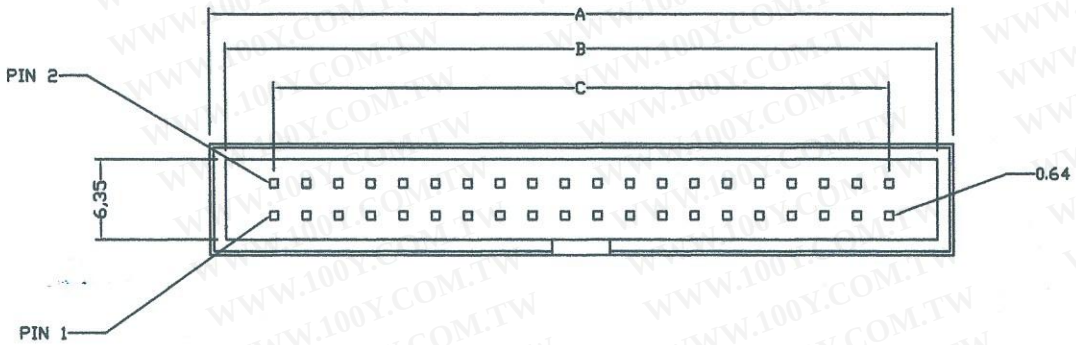


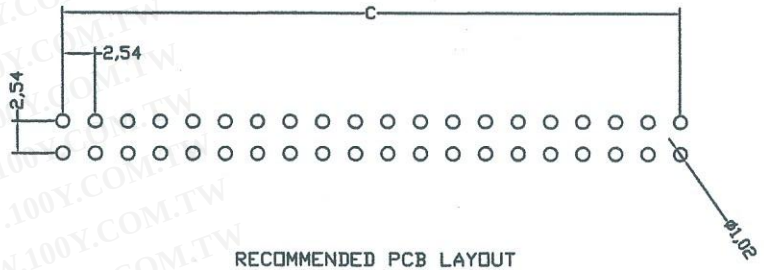

RECOMMENDED PCB LAYOUT

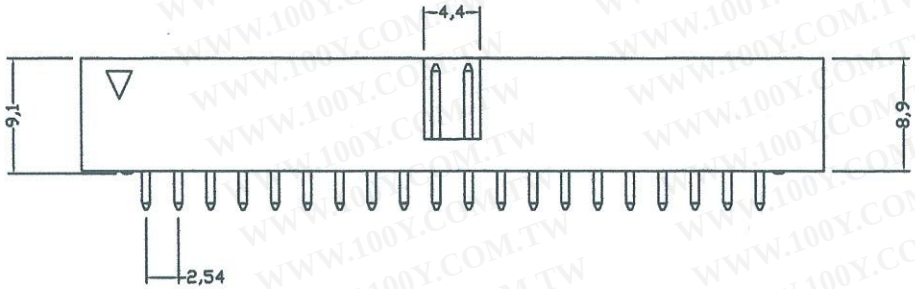



SPECIFICATIONS:
Material:
Insulator: PBT
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC / minute
Mechanical:
Mating durability: 500 cycles min
Temperature Rating:
Operating temperatures: -40° to +105°
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 200° for 5-10 second

A = 2.54 X No. of positions / 2 + 7.6
B = 2.54 X No. of positions / 2 + 5.08
C = 2.54 X No. of spaces

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

修訂編號	修訂註解	日期	Signature	已檢查

參考項目	數量	標題/名稱, 設計, 材質, 備註等				文章編號/參考	
設計人 yulian		檢查人 XXX	審核人 - 日期 XXX - 00/00/00	檔名		日期 08/11/06	比例 X
						Edition 0	圖紙 1/1