


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

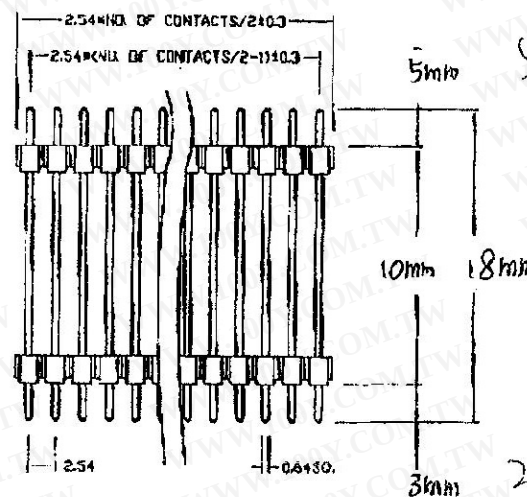

SPECIFICATIONS:

Material

Insulator: PBT, rated UL94V-0

Insulator Color: Black

Contacts: Brass

Plating: Gold Flash over Nickel underplate overall

Electrical

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating


Operating temperature: -55° to +105°

Environmental

Lead free, RoHS compliant



Recommended PCB Layout

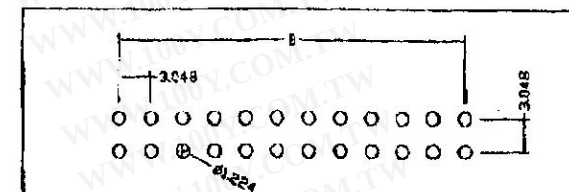

零件類別	數量	製造/包裝, 設計, 材料, 規格等	生產數量/日期
零件人 yclian	數量人 XXX	零件人 - 日期 XXX - 00/00/00	規格 2.54
254 254 254			
Edition 0			日期 1/1