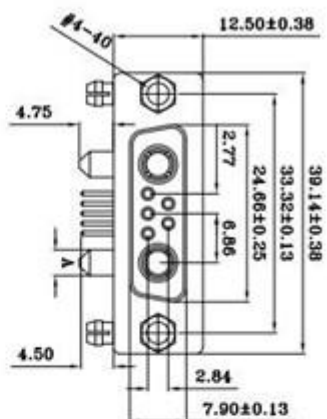


PCB LAYOUT

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PART NO.	Current Rating	Dimension	
		e A	e B
1196-072-815-000	40 AMPS	ø3.75	ø4.20
1196-072-615-000	30 AMPS	ø3.2	ø3.70
1196-072-415-000	20 AMPS	ø2.8	ø3.28
1196-072-215-000	10 AMPS	ø1.7	ø2.20

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC.
 30% GLASS FILLED UL 94V-0 RATED BLACK COLOR
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 10.20 OR 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

Drawn by	liangdong	2002.05.10
Designed by	caifu	2002.05.10
Approved by	yangjiguo	2002.05.10
Sheet 1 of 1	Code 000	
Dimensions in mm(inches)	Scale 1:1	
Tolerances mmXX+/-0.13	Angles+/-2°	

Viv AO	Part No:	1196-072-X15-003
--------	----------	------------------

D-SUB CONNECTOR
 Power Contact (High Amp or High Temp)