



DB9/15/25/37/50用1.0公母端子



HDB15/26/44/62/78用0.76公母端子

公头端子针（车针）





母头端子针（车针）






母头端子针（冲针/普通款）



公头端子针（冲针/普通款）

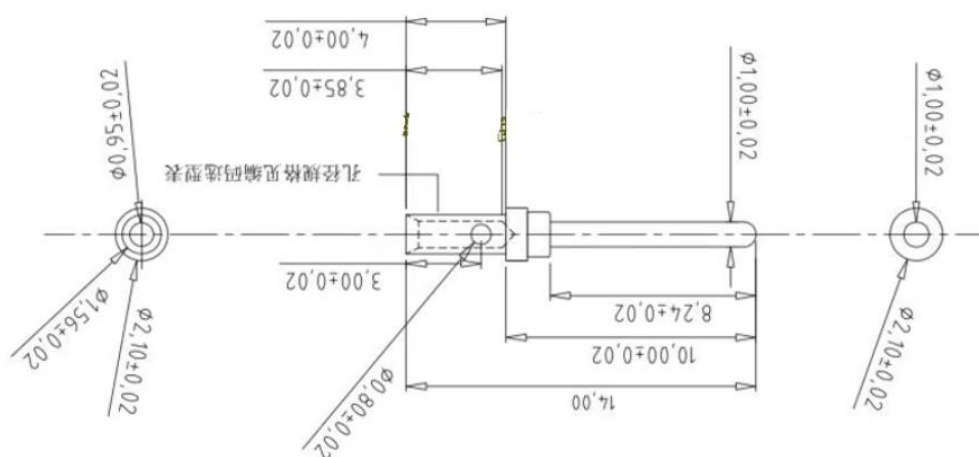
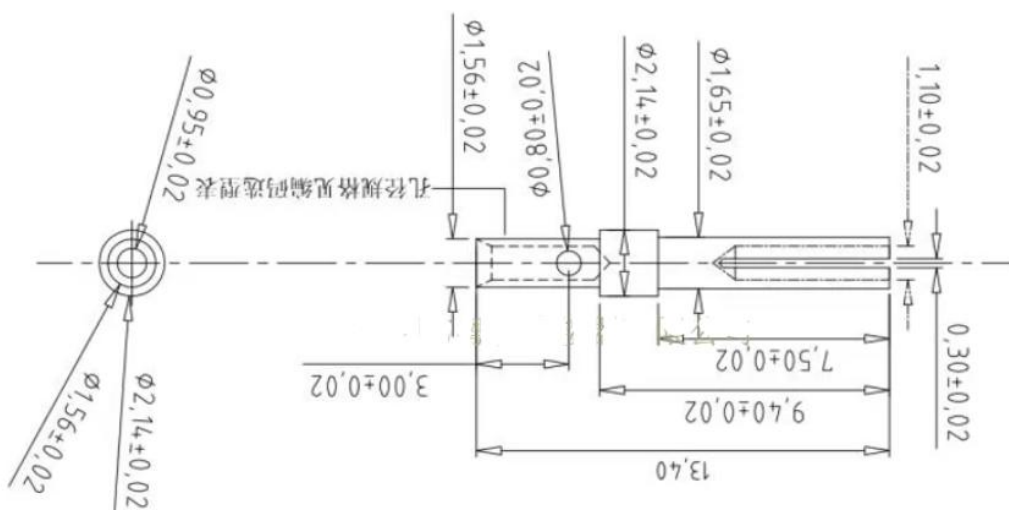


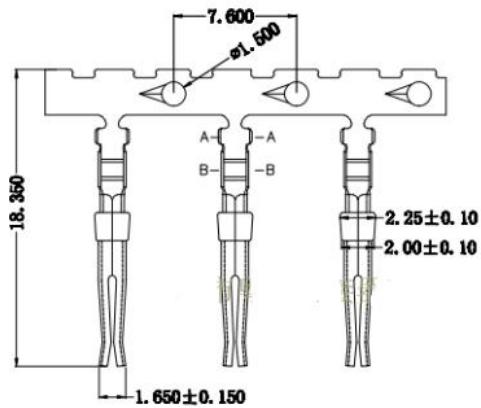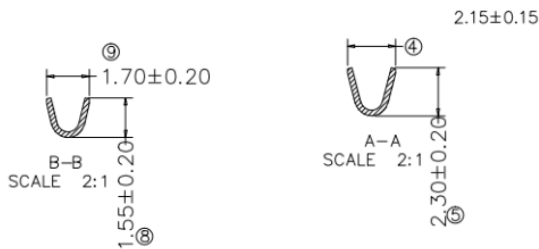

备注 (NOTES):


- 电镀: 镀底500", 镀金500"
镀层要均匀, 不能有发黑发白及露铜现象
- 冲压要求: 未标公差者按图所示
未标下料尖角和冲剪锐角处以最大R0.15处理
冲裁毛刺小于0.05。
- 外观: 制件表面无油污, 无压伤变形, 无划痕和裂纹

工程图

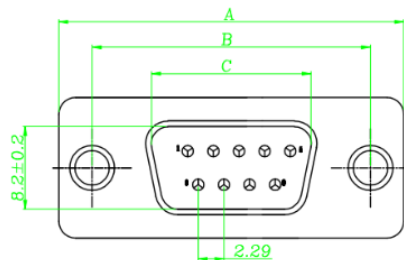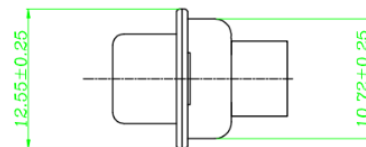



备注:

- 性能:
 - 额定电压: 250V
 - 额定电流: 3AMP
 - 接触阻抗: 30mΩ MAX.
 - 绝缘阻抗: 1000MΩ MIN. at 500V DC
 - 耐电压: 500V Per minute
 - 温度范围: -55℃~105℃
- 材质:
 - 胶芯: PBT+30% G.F (UL94V-0)
 - 铁壳: SPCC 前镀后锡

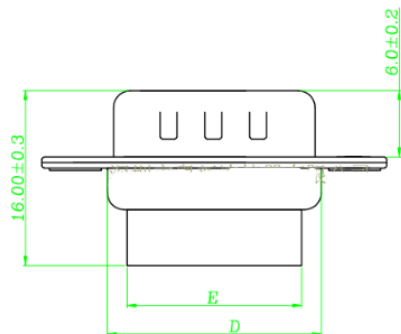

PIN	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25
9	30.81	24.99	16.92	19.28	18.80 ✓
15	38.85	32.38	25.35	27.75	26.50
26	52.05	47.04	38.95	41.30	37.85
37	65.50	63.50	55.48	57.40	54.50

TOLERANCE: XX ±0.25 XXX ±0.20 XXXX ±0.15	品名规格	打线式DEC9-37公厘胶
---	------	---------------

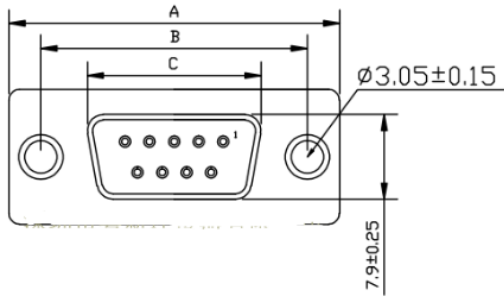

备注:

1. 性能:






额定电压 :250V
 额定电流 :3AMP
 接触阻抗 :30mΩ MAX.
 绝缘阻抗 :1000MΩ MIN. at 500V DC
 耐电压 :500V Per minute
 温度范围 :-55℃~105℃

2. 材质:

胶芯 :PBT+30% G.F (UL94V-0)
 铁壳 :SPCC 前锡后锡

PIN	A±0.25	B±0.25	C±0.25	D±0.25
9	30.81	24.99	16.33	18.88
15	28.88	22.88	14.88	16.88
25	26.88	20.88	12.88	14.88
37	24.88	18.88	10.88	12.88

TOLERANCE: DRAWN BY: DATE: PART NAME:

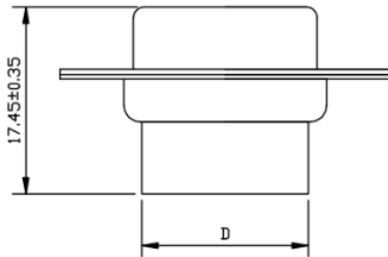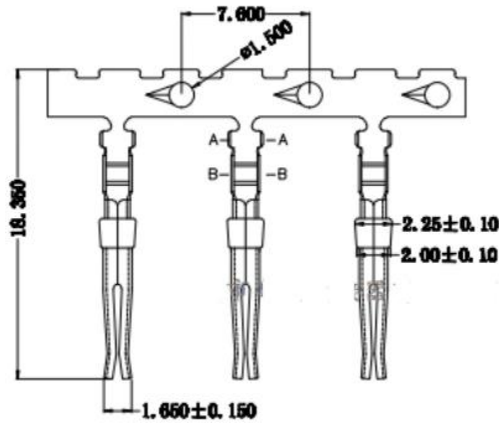

备注 (NOTES):

- 电镀:镀镍500", 镀金区镀金
镀层要均匀, 不能有发黑发白及露铜现象
- 冲压要求: 未标出公差者如图示
未标出下料尖角和冲剪锐角处以最大R0.15处理
冲剪毛刺小于0.05.
- 外观: 制件表面无油污, 无压伤变形, 无划痕和裂纹

工程图

