





DG128-5.0

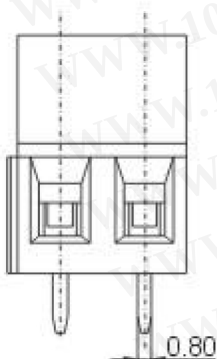

认证

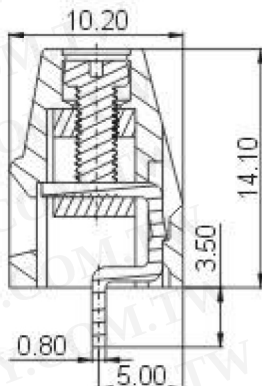

电气性能

参考标准

UL

IEC

额定电压

300V

250V

额定电流

15A

18A

使用线径

24-12AWG

2.5mm²

耐电压

AC2000V/1Min

机械性能

扭力矩

0.4Nm(3.5Lb-In)

温度范围

-40℃~+105℃

剥线长度

6mm

尺寸

间距

5.0mm(.197")

极数

2P,3P-24P

材质和电镀

塑件

PA66,UL94V-0

螺丝

M2.5,钢,镀Cr³⁺钝化彩锌

焊针

黄铜,镀锡

方盒

黄铜,镀镍

订购方式:

		P	1	X	X	X
				客户需求		
型号		极数		颜色		
1 单倍间距		2 双倍间距		1 灰色	4 绿色	7 透色
				2 蓝色	5 橙色	8 黄色
				3 黑色	6 红色	9 白色