
Spring plugs for pluggable terminal blocks ／ 0134 series

RoHS compliance

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

0134-41



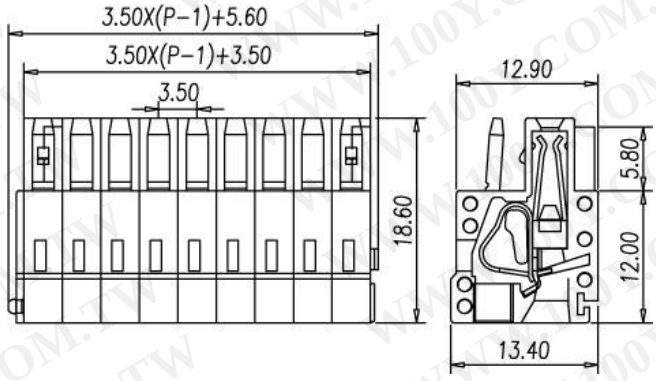

Pitch: 3.50mm

Approval	cULus	
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Conductor cross-section, solid (AWG/ mm^2)	28~14	
Conductor cross-section, flexible (AWG/ mm^2)	28~14	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / KV	
Torque (N-m)		
Screw		
Wire strip length	8~9mm	

Pole	Cat. No.
02	0134-4102
03	0134-4103
:	:
:	: