
勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Headers(Sockets) for pluggable terminal blocks ／ ECH & EHD series

RoHS compliance

2ESHM



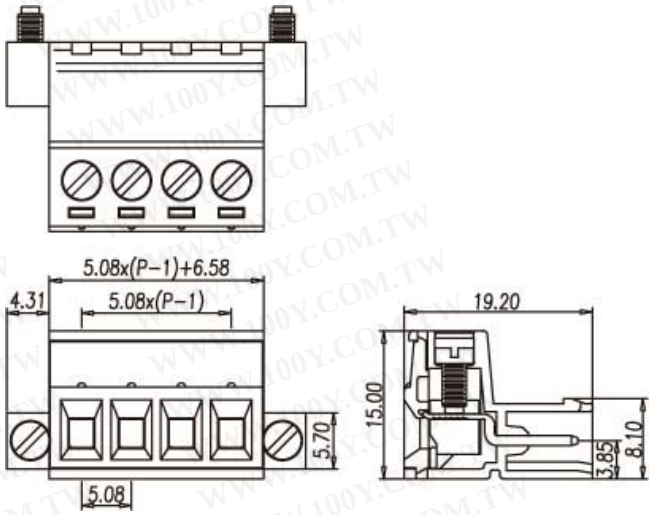

Pitch: 5.08mm

Approval	cULus	
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Conductor cross-section, solid (AWG/ mm^2)	24~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm2)	24~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.57	
Screw	M2.5	
Wire strip length	7~8mm	

Pole	Cat. No.
02	2ESHM-02P
:	:
:	:
12	2ESHM-12P