REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		



SPECIAL LATCH



STANDARD LATCH

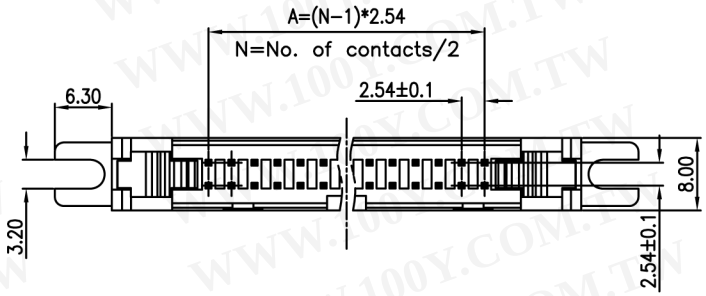

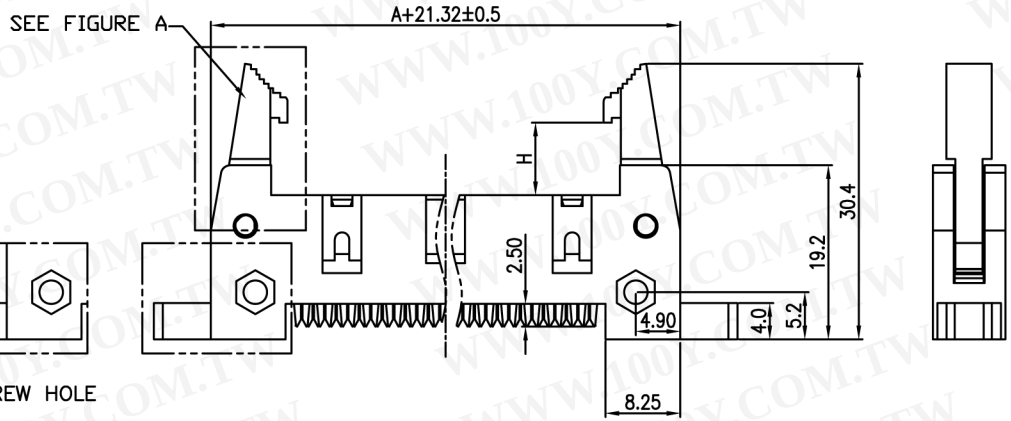

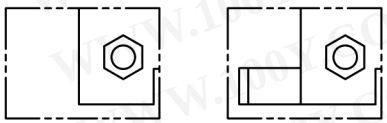

W/O SCREW HOLE W/ SCREW HOLE

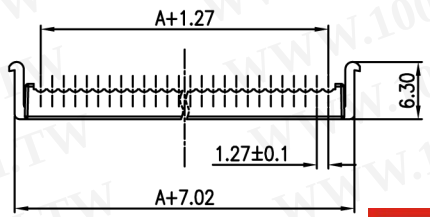

COVER



NOTES:

1. MATERIAL
   - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
   - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   - 2.1 STORAGE TEMPERATURE:-40°C~+105°C.
   - 2.2 CONTACT RESISTANCE:20mΩ max.(initial).
   - 2.3 INSULATION RESISTANCE:1000MΩ min.
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PART NUMBER: DS1012
4. PRODUCT NUMBER CODE:

DS1012- X X X X X X X

- LOCK DIM.H
  - 8: 8.00mm (standard)
  - 4: 4.60mm (special)
- HOUSING COLOR
  - A: GRAY
  - B: BLACK
- CONTACT PLATING
  - 0: SELECTIVE GOLD FLASH
- STRAIN RELIEF
  - N: W/O
- SCREW HOLE
  - M: W/
  - N: W/O
- EJECTOR TYPE
  - L: Long
- No.OF CONTACTS
  - 10 14 16 24 26 30 40 50 60 64
- SERIES No.
  - DS1012

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

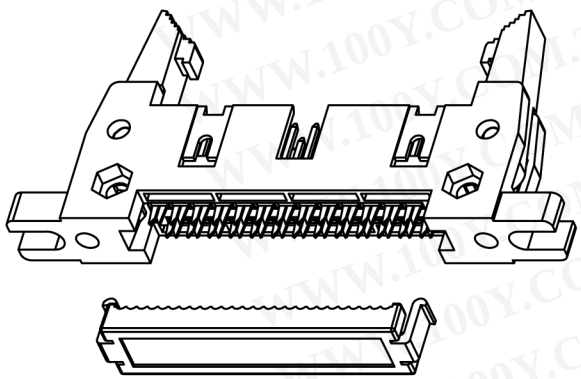

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1012-XXXXXXX		

PROJECTION		TITLE	IDC SHROUDED HEADER MATES WITH PITCH 1.27mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1012 SERIES

CONNFLY