REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/11/11'	~	

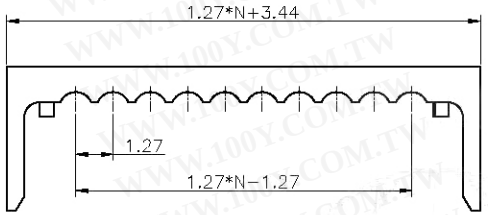



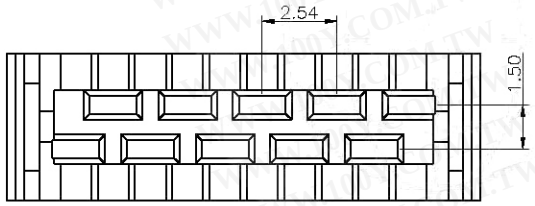

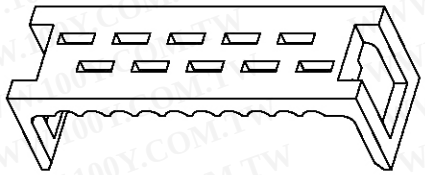

COVER

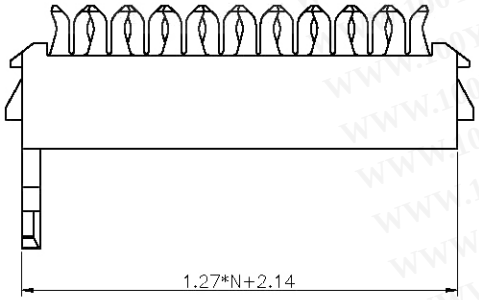



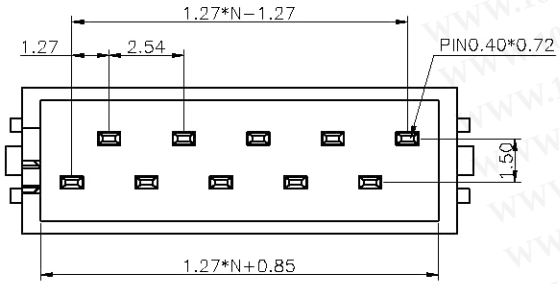

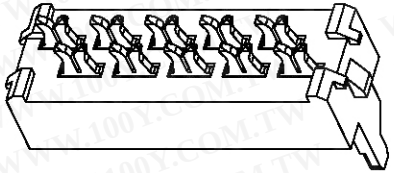

HOUSING

NOTES:

1. MATERIAL
   - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
   - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   - 2.1 TEMPERATURE RANGE:-40°C~+105°C.
   - 2.2 CONTACT RESISTANCE:30mΩ max.
   - 2.3 INSULATION RESISTANCE:1000MΩ min.
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PRODUCT NUMBER CODE:
   DS1015-01- X X X
   - CONTACT PLATING
     2: NICKEL + GOLD FLASH
     6: Full Tin
     8: Full GOLD FLASH
   - HOUSING COLOR
     R:RED
   - No. OF CONTACTS
     04 06 08 10 12
     14 16 18 20 24

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1015-01-XXX		

PROJECTION	⊕	TITLE	MICRO MATCH MALE ON WIRE CONNECTOR
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1015-01 SERIES