REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/20/05'		

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

HOUSING WITH CONTACT

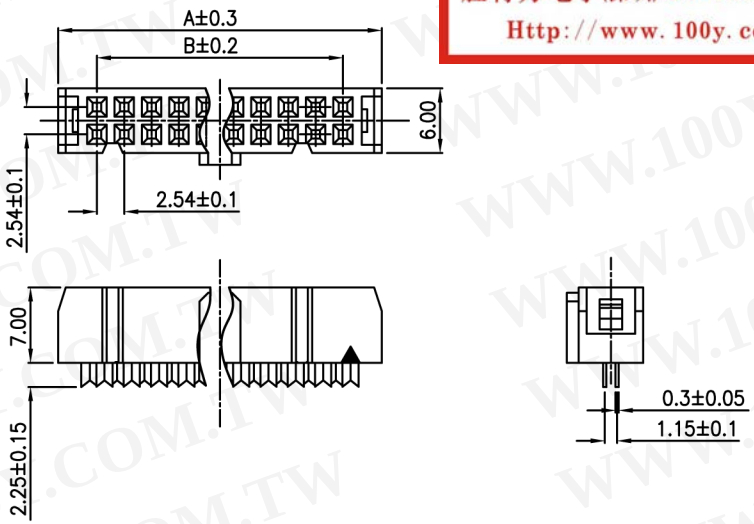

UPPER COVER

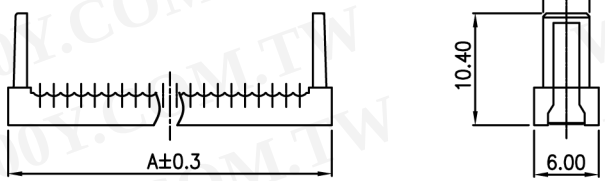

TOP COVER

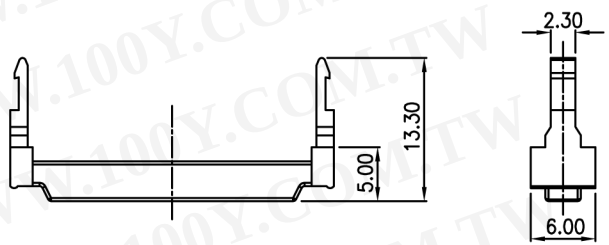

Posltion	Dimension	
	A	B
08	14.82	7.62
10	17.36	10.16
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   - 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
   - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   - 2.1 TEMPERATURE: −40°C~+105°C.
3. PART NUMBER: DS1016
4. PRODUCT NUMBER CODE:

DS1016− X X X X X X

- HOUSING COLOR
  G:GRAY
  B:BLACK
  L:BLUE
- TERMINAL MATERIAL
  B:BRASS
- CONTACT PLATING
  Si:SELECTIVE GOLD FLASH
  8:FULL GOLD FLASH
  2:Gold flash + Nickel
  N:Full Nickel
- POLARIZATION
  A:W/
  B:W/O
- STRAIN RELIEF
  M:W/
  N:W/O
- No. OF CONTACTS
  08 10 14 16 20
  24 26 30 34 40
  50 60 64
- SERIES No.
  DS1016

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1016-XXXXXX		

PROJECTION		TITLE	I.D.CSOCKET PITCH 2.54mm
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1016 SERIES

CONNFLY