

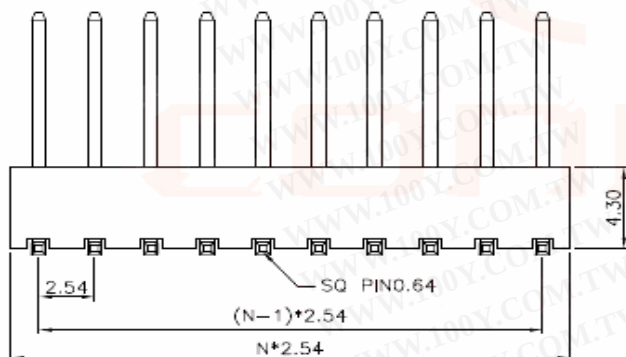


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

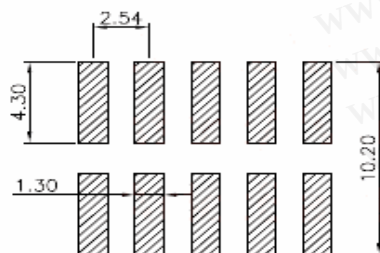

RECOMMEND PCB LAYOUT
 (TOLERANCE=±0.05)




TABLE A:

TYPE	Dimension		Pin Length (mm)
	A	B	
1	8.20	9.80	15.60
2			
3			
4			
5			
6			
7			

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 A.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO +105°C.

3. PRODUCT NUMBER CODE:

DS1022-04 - X X X X - X

②
 PLATING LEVEL(FOR GOLD ONLY)
 3A: LEVEL 3A
 B: LEVEL B
 Dim. A B type
 1: Type 1
 CONTACT PLATING
 8: Full gold flash
 6: Full Tin
 MOUNTING TYPE
 S: SMT TYPE
 No.OF CONTACTS
 2*2-2*40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	PIN HEADER PITCH 2.54mm SMT TYPE H=4.3mm	
X.	±0.60	X.	±5°	mm	mm			
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE	CUSTOMER							
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1022-04-XXXX-X-B							