

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'	~	LJC 05/17/05'
B	统一尺寸规格	LL 11/16/06'	~	LJC 11/16/06'
C	增加尺寸选项	YCH 07/27/10'	~	LJC 07/27/10'
E	DEL P/N CODE	JLZ 10/28/14'	~	

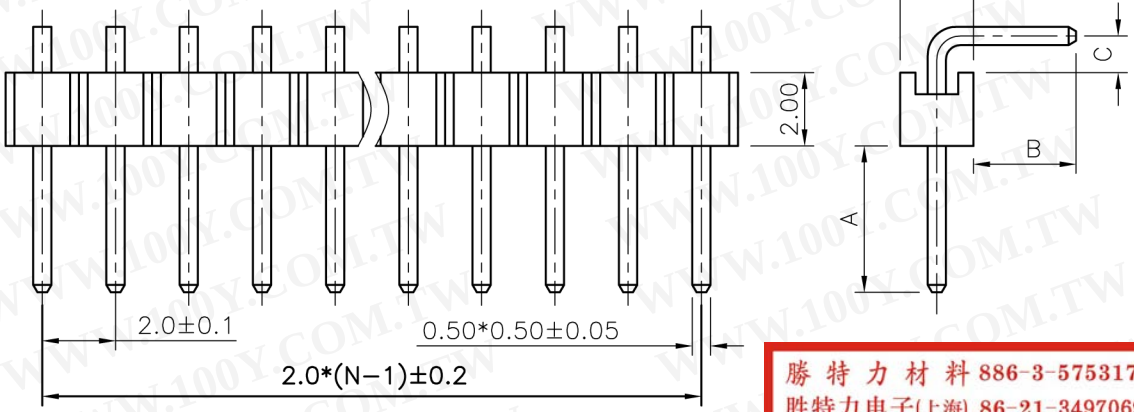

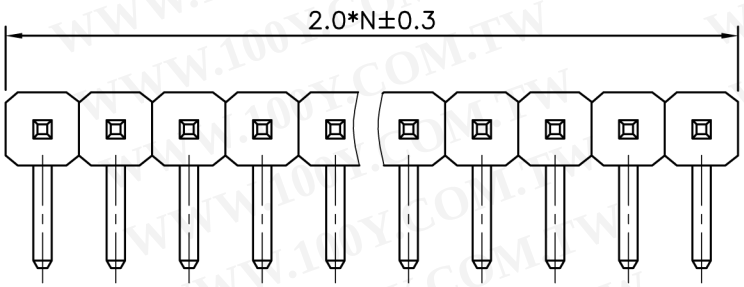


N: NUMBER OF CONTACTS
A&B&C: CUSTOMER LENGTH AVAILABLE

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

NOTES:
1. MATERIAL & FINISHES:
   1.1 INSULATOR: THERMOPLASTIC(UL 94V−0).
   1.2 CONTACT MATERIAL: COPPER ALLOY.
2. SPECIFICATION
   2.1 CURRENT RATING: 1.5 Amp.
   2.2 INSULATION RESISTANCE: 1000MΩ Min.
   2.3 DIELECTRIC WITHSTANDING: 600VAC.
   2.4 CONTACT RESISTANCE: 20mΩMax.
   2.5 OPERATING TEMPERATURE: −40°C TO +105°C.
3. PRODUCT NUMBER CODE:
   DS1025−02 − X X X X X X − X
   - PLATING LEVEL(FOR GOLD ONLY) Ⓓ
     3A: 0.8−1.2u" B: LEVEL B Ⓔ
   - Dim. A B C type
     1: Type 1
     2: Type 2
     3: Type 3
     4: Type 4
     5: Type 5
     .....
   - MOUNTING TYPE
     R: RIGHT ANGLE TYPE
   - HOUSING COLOR
     B: BLACK
   - CONTACT PLATING
     8: FULL GOLD FLASH
   - CONNECTOR TYPE
     P: PLUG
   - No.OF CONTACTS
     1*2−1*40

TABLE A:

	TYPE	Dimension A	Dimension B	Dimension C	Pin Length
Ⓑ	1	4.00	2.80	1.00	10.50
	2	5.00	2.50	1.00	11.00
	3	5.00	4.75	0.75	13.10
	4	3.80	3.80	0.75	11.00
	5	2.50	2.80	1.30	9.20
	6	3.70	3.00	1.75	11.00
	7	3.50	2.50	0.25	9.00

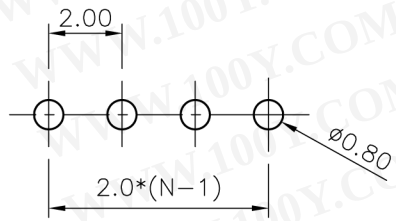

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1025−02−XXXXXX−X−E		

PROJECTION	⊕	TITLE	2.0mm PIN HEADER SINGLE ROW RIGHT ANGLE TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1025−02 SERIES

CONNFLY®