
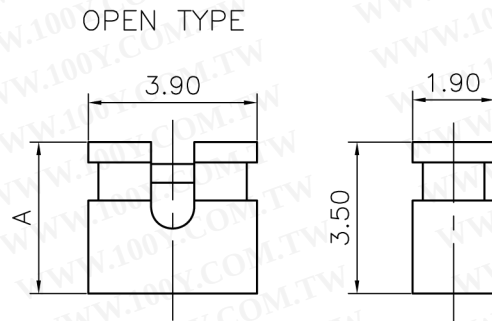

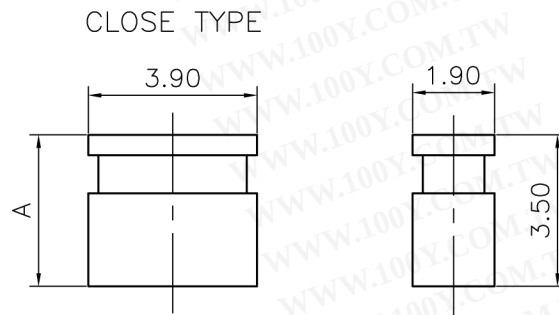


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		



NOTES:

1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ MINI.
- 1.4 OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

DS1028 - X X X X X

PROFILE HEIGHT(DIM A):

1: 3.50mm

2: 5.00mm

CONTACT PLATING:

F1: FULL GOLD FLASH

N: NICKEL

2: GOLD+NICKEL

HOUSING COLOR:

B: BLACK U:BLUE Y:YELLOW

W: WHITE E:GREEN R:RED

HOUSING TYPE:

A:OPEN B:CLOSE

No.OF CONTACTS:

2: 2pin

SERIES No:

DS1028

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI JUMPER PITCH 2.00mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1028 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1028-XXXXX							