

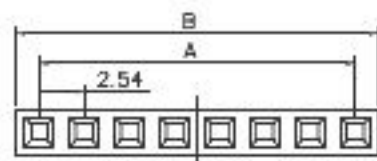
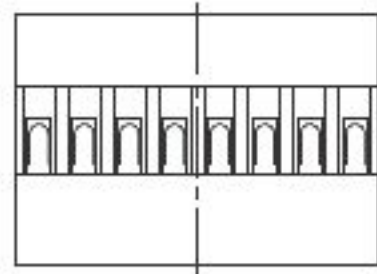



FEMALE Housing



FEMALE TERMINAL

Wire Range		O.D of Wire
Section Area (mm ²)	AWG#	mm
0.09~0.3	28~22	1.2~1.6

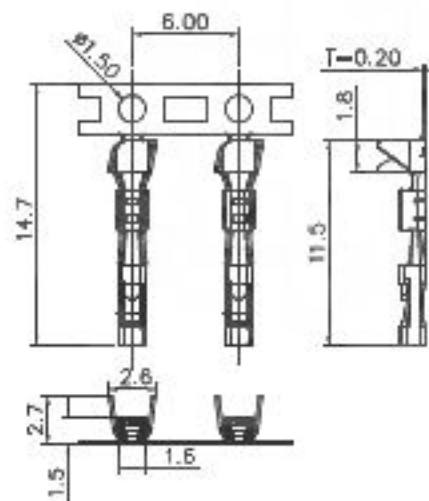

Position	DIMENSION	
	A	B
1	-	2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10

NOTES:

1. MAIN SPECIFICATIONS

- Housing material: NYLON 66
- Wire range: AWG#28~#22
- Rated voltage: 250V
- Rated current: 3A
- Contact resistance: $\leq 30\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Withstanding voltage: 500V, AC 1 minute
- Temperature range: $-25 \sim +85^\circ\text{C}$
- Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

I - DS1071 - S C X 0 XX

(For Female Housing Only)



Housing Number
1*1~1*40
2*2~2*40Housing Color
B: Black

T - DS1071 - S C X 0 0




(For Female Terminal Only)


Contact Plating
6: Tin
8: Full gold flashMALE PRODUCT NUMBER CODE
SEE DS1021&DS1022

MALE V/T TYPE



MALE R/A TYPE

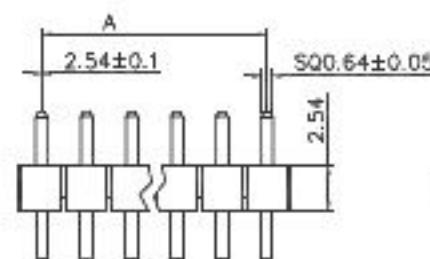

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	P.C.B CONNECTOR 2.54mm TJC8 TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1071 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<div>勝特力材料 886-3-5753170</div> <div>勝特力电子(上海) 86-21-34970699</div>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1071-XXXXX-B					
				<div>公司</div> <div>CO. LTD</div>			

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787

公司
 CO. LTD