

1

2

3

4


5

A

B

C

D

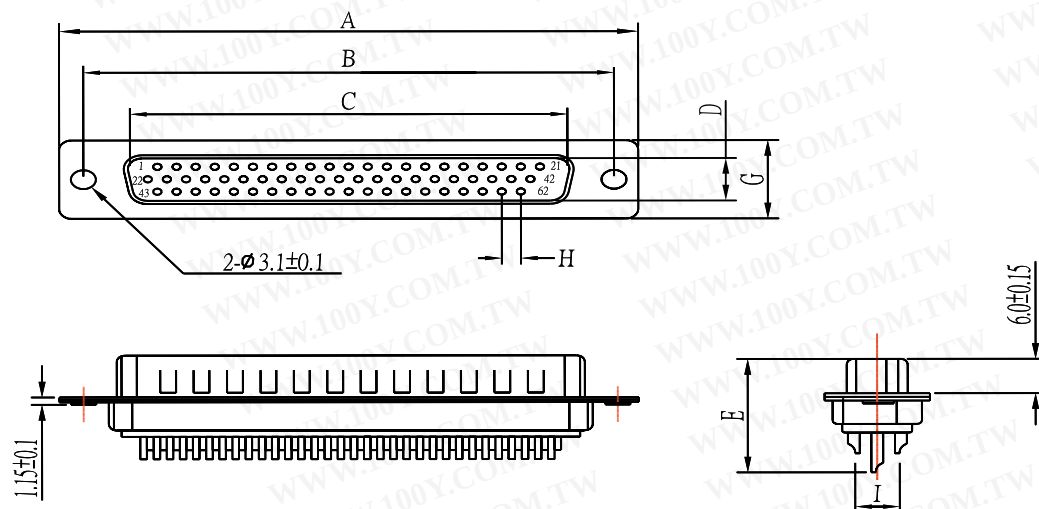

Note:

1.Material:

1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: Copper alloy,t=0.20mm

1.3 Shell: Spcc,t=0.30mm

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding

voltage: 750 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min.

2.5 Total mating force: 8.0 Kgf Max.

2.6 Total unmating force: 1.5 Kgf Min.

2.7 Temperature range: -55°C~85°C

A	前鉗型(不通孔)	B	后鉗型(通孔)

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.25	G±0.25	H±0.05	I±0.10		
HDD-15P	30.81	24.99	16.92	8.38	17.0		12.55	2.29	3.96		
HDD-26P	39.25	33.32	25.25	8.38	17.0		12.55	2.29	3.96		
HDD-44P	53.04	47.04	38.96	8.38	17.0		12.55	2.29	3.96		
HDD-62P	69.50	63.50	55.42	8.38	17.0		12.55	2.41	3.96		

DRAWN:

GENERAL TOLERANCE:

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SIZE

CHECKED:

UNIT:

SCALE:

SHEET:

PROJECTION:

DESCRIPTION:

PART NO: E08-xxP

A4

JECSON

REV

Date

FILE

BY