


Layout 請查看第2頁

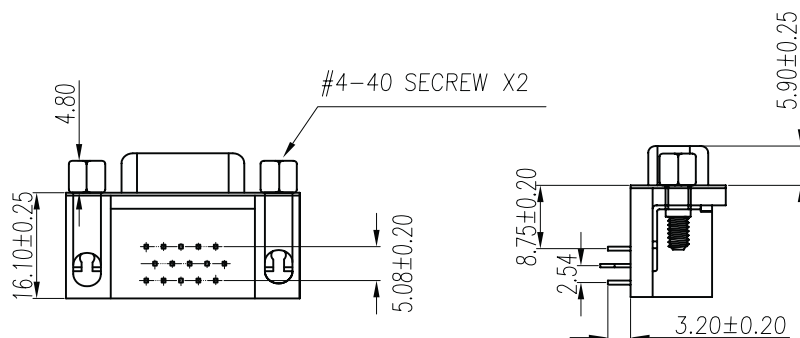

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	I±0.20
HDR-15S	30.80	25.00	16.30	7.90	12.60	3.96
HDR-26S	39.20	33.32	24.70	7.90	12.60	3.96
HDR-44S	53.05	47.04	38.38	7.90	12.60	3.96
HDR-62S	69.40	63.50	54.80	7.90	12.60	3.96

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass, $t=0.20\text{mm}$.
- 1.3 Shell: Cold rolled steel, $t=0.40\text{mm}$.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kg Max.
- 2.6 Total unmating force: 1.5 Kg Min.
- 2.7 Temperature range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

5	Rivated	2	Brass	5.4*5.1mm	Nickel Plated
4	"Z" type board-lock	2	Brass	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed, All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

DRAWN:

GENERAL TOLERANCE:

CHECKED:

UNIT:

SCALE:

SHEET:

PROJECTION:

SIZE

DESCRIPTION:

PART NO: E11-xxP

A4

JECSON

REV

Date

FILE

BY

	Plug	Socket
15 Positions		
26 Positions		
44 Positions		
62 Positions		

PRAT NO:		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: mm	SAZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		DR: 黃義強 06/09/11	
X ±0.20		CHK: Kevin 06/09/11	
.XX ±0.10		APP: Kent 06/09/11	
.ANG ±1		SCALE: 1:1	
		DWG NO:	
		SHEET: 1 of 1	
		Rev. A0	

HDR SERIES P.C.B LAYOUT