



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

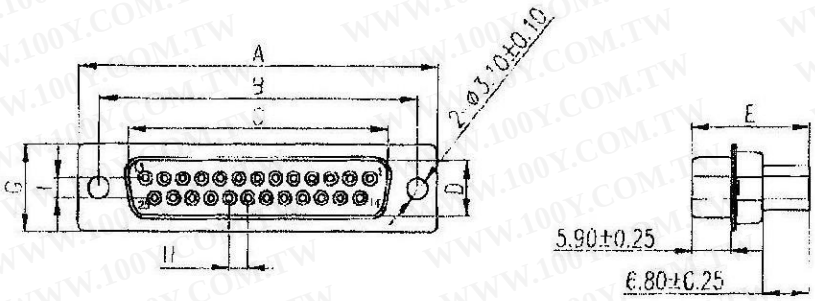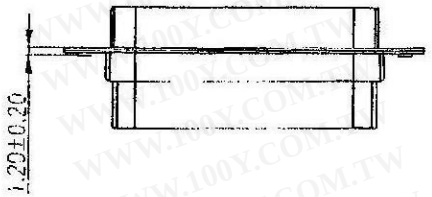



A	前鉚型(不通孔)	B	后鉚型 (通孔)
			

Note:

1.Material:

1.1 Front Insulator: P.B.T UL 94-V0 rated.
1.2 Back Insulator: PA66 UL 94-V0 rated.
1.3 Contact: Brass,t=0.20mm.
1.4 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mW Max.
2.4 Insulation resistance: 1000 MW Min at DC 500V.
2.5 Total mating force: 5.0 Kgf Max.
2.6 Total unmating force: 2.5 Kgf Min.
2.7 Temperature range: -55°C~+105°C

3.Finishes:

3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel,tin or Gold plated

No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish
6	5.8 Nut	2	Brass	H4.75x5.8	Nickel Plated
5	4.0 Nut	2	Brass	H4.75x4.0	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	9~37	Brass	T=0.20mm	Gold Flashed
1	Back Housing	1	PA66	UL 94-V0	Black/Blue/White
	Front Housing	1	P.B.T	UL 94-V0	Black/Blue/White

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
CR-09S	30.80	25.00	16.30	7.90	17.50	12.60	2.77	2.84
CR-15S	39.20	33.32	24.70	7.90	17.50	12.60	2.77	2.84
CR-25S	53.05	47.04	38.40	7.90	17.50	12.60	2.77	2.84
CR-37S	69.40	63.50	54.80	7.90	17.50	12.60	2.77	2.84

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

PART NO:	MATERIAL:		
MODEL NO:	FINSH:		
UNIT: mm	SIZE: A4	COLOR:	PART NAME: D SUB CRIMP(F)
TOLERANCE UNSPECIFIED .x ±0.3 .xx ±0.20 .xxx ±0.100 ANG. ±°	DR: '06/04/01		
	CHK: '06/04/01	DWG NO:	REV: A0
	APP: '06/04/01	SCALE: 1:1	SHEET: 1 of 1

WWW.100Y.COM.TW