勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

| REV. | DESCRIPTION | DATE |
|---|---|---|
| B | 00'1205 | Dec 27,2000 |
| C | 01'0412 | Apr 24,2001 |
| D | 01'0609 | Jan 13,2001 |
| E | 01'1107 | Nov 14,2001 |
| F | 04'0718 | Jul 17,2004 |
| G | 05'0476 | Apr 25,2005 |

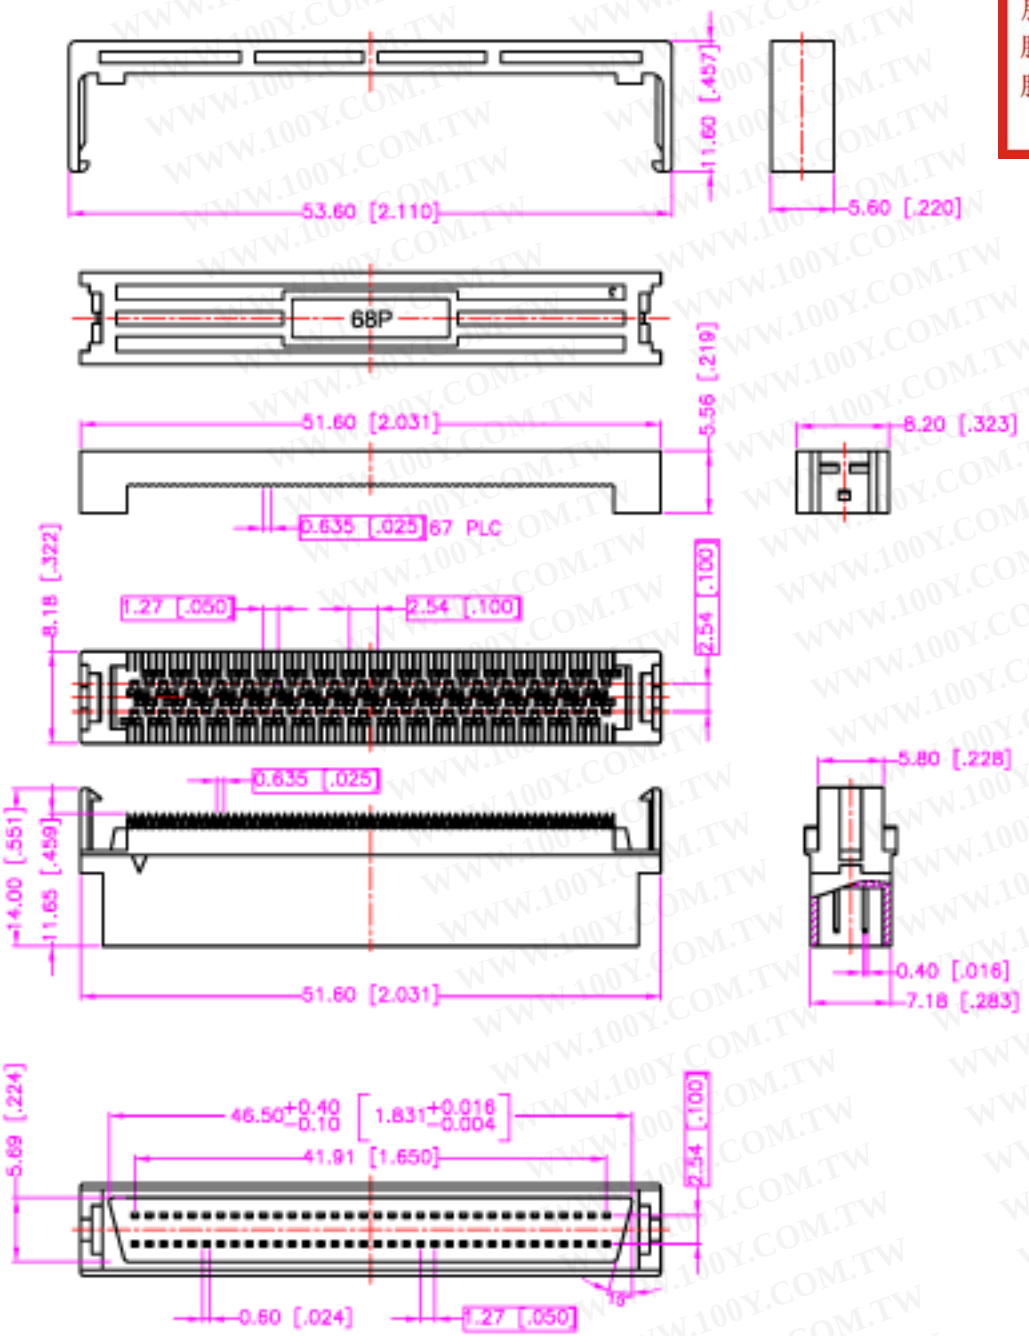


## MATERIALS

1. HOUSING : THERMOPLASTICS(UL 94V-0)
2. TERMINAL : COPPER ALLOY
   GOLD PLATED ON CONTACT AREA
   UNDER NICKEL PLATED. (t=0.40mm)

## SPECIFICATION

1. CURRENT RATING :1 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
   500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M ΩMIN.
   AT 500V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.

## ORDER INFORMATION:

2041068-01X-R

- SERIES CODE
- I.D.C
- MALE
- NUMBER OF POSITIONS
- ROHS
- FOLLOW NUMBER
- CONTACT PLATING: GOLD FLASH

| PART NO. | COLOR | DESCRIPTION |
|---|---|---|
| 2041068-015-R | BLUE | SCSI II 68 PIN PLUG IDC (4R) W/O LOGO KIT (WITH SR) |
| 2041068-018-R | BLACK | |
| 2041068-017-R | BLUE | SCSI II 68 PIN PLUG IDC (4R) W/O LOGO KIT |
| 2041068-011-R | BLACK | |

| | | |
|---|---|---|
| TOLERANCE .0=±.0.38 [.015] .00=±0.25 [.010] .000=±0.15 [.006] .0000=±. ANG.=±3° | DRAWER Harry | |
| | CHECK Jimmy | |
| | APP'D Wendy | NAME SCSI II 68 PIN PLUG IDC (4R) W/O LOGO KIT(ROHS) |
| UNITS : mm [inch] | PRODUCT SPEC. — | DRAW NO. R2041068-01x |
| SCALE NONE / SIZE A4 | SHEET 1 OF 1 / REV. G | |