


A

B

C


D

E

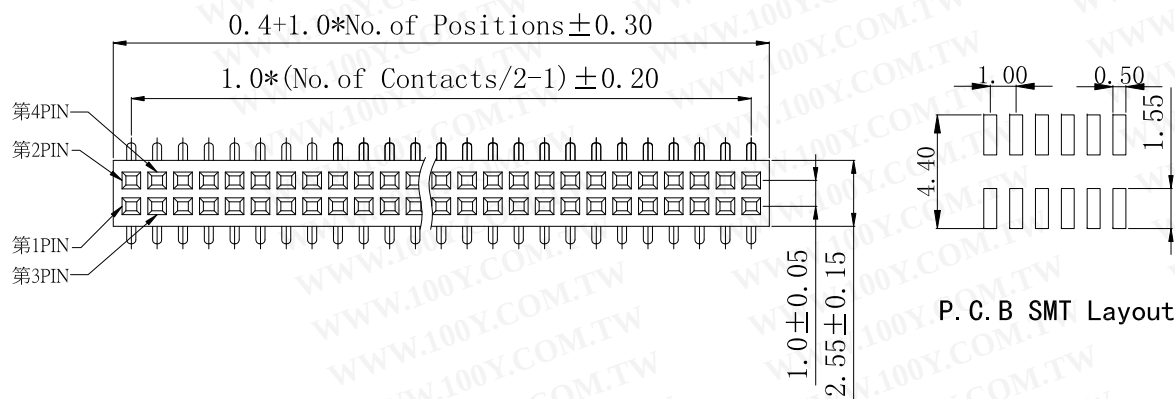

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard	:LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

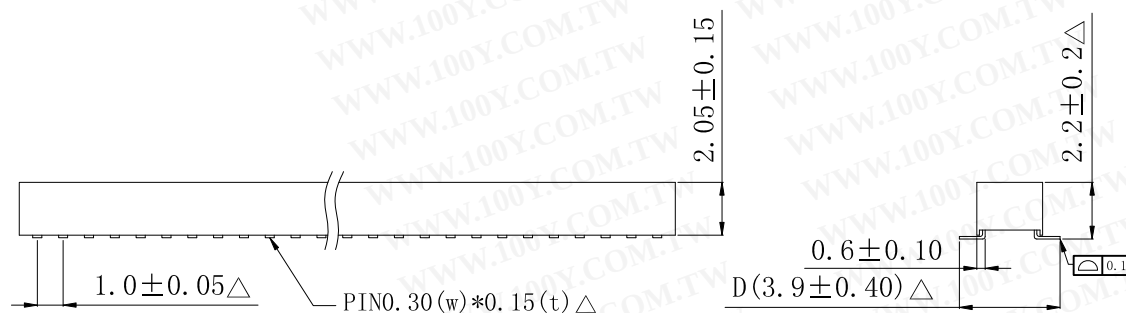

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F801	X	X	X	DXXX	-XX
(Female Header Dual Row)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	C:LCP (Standard:C)	M-D D039	(04 TO 80 Contacts)

所有材料為
"環保材料"

2014.12.22

RoHS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.00mm Female Header H:2.05 SMT	黃炳秋	(公差)	A/2			
LCP	CHECKED(確認): 黃炳秋	X. ±0.30 X.° ±5.0° .X ±0.20 .X.° ±3.0° .XX ±0.15 .XX.° ±1.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2014.12.10
PART NO: (料號) F801-MGC-D039-XX	APPROVAL(核准): 鄧文廣	SCALE(比例): XX:XX	SIZE: A4	2	修改P.C.B SMT Layout	2014.12.16
DWG NO(圖號):			SHEET: 1/1	3		
				4		