

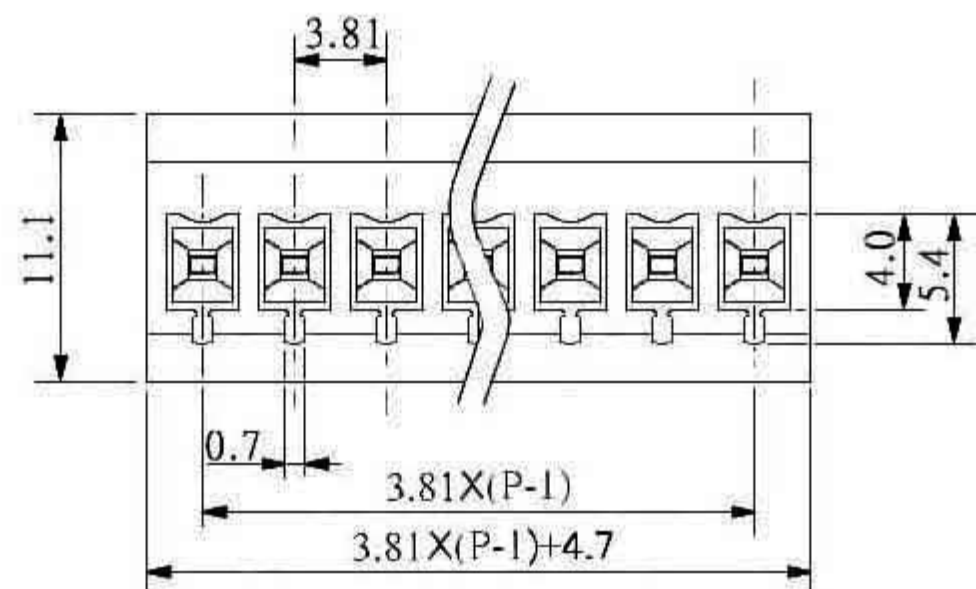
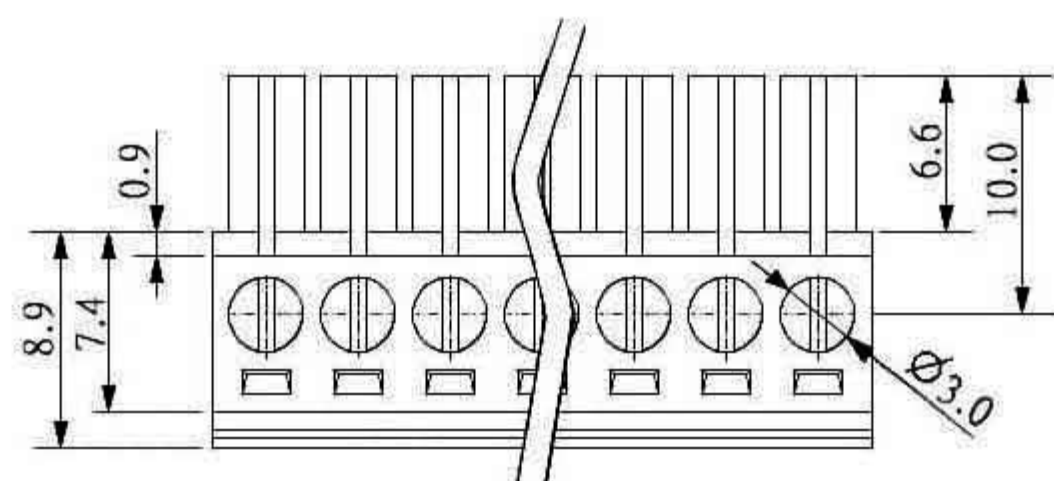


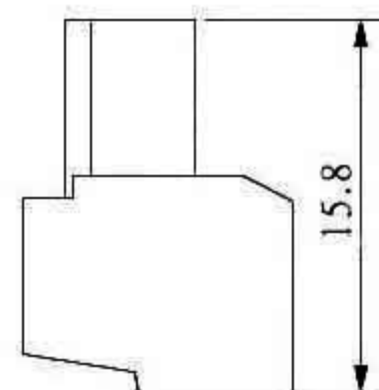

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

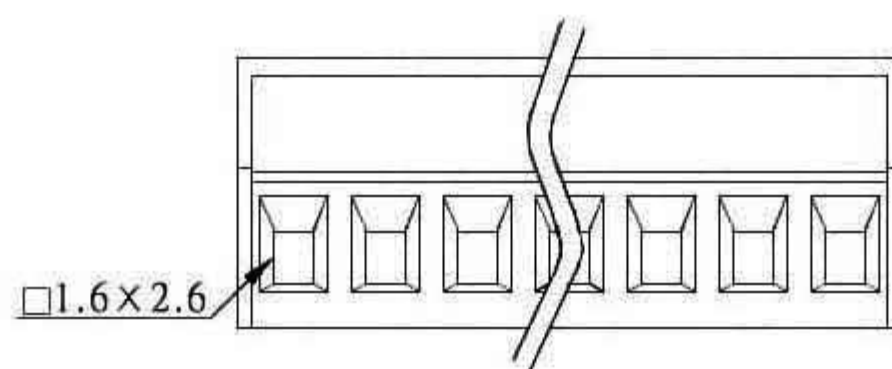

Specifications

Rating:8A 300VAC

Contact:Phosphor Bronze, 0.3t, Nickel Plated.

Cage clamp:Brass, Nickel Plated.

Screw:M2.0, Steel, Zinc Plated.

Screw Torque:Value:3kg-cm

Housing Material:Polyamide 66, Green

Insul. Withstands Voltage:AC 2000V/min

Insul. Resistance:500MΩ or More at DC 500V

Using Temperature Range:-40°C~+105°C

Poles:2P~16P

UNIT 單位	SCALE 比例		
MM			
TOLERANCE 公差		MAT'L 材料	TITLE GGC-381-K_P
X.X±		FINISH 處理	
X.XX±		DESIGN 設計	
ANGLE 角度		APPR 核准	PART NO 料號:
			DRAW NO 圖號:
			REV 版次 A