
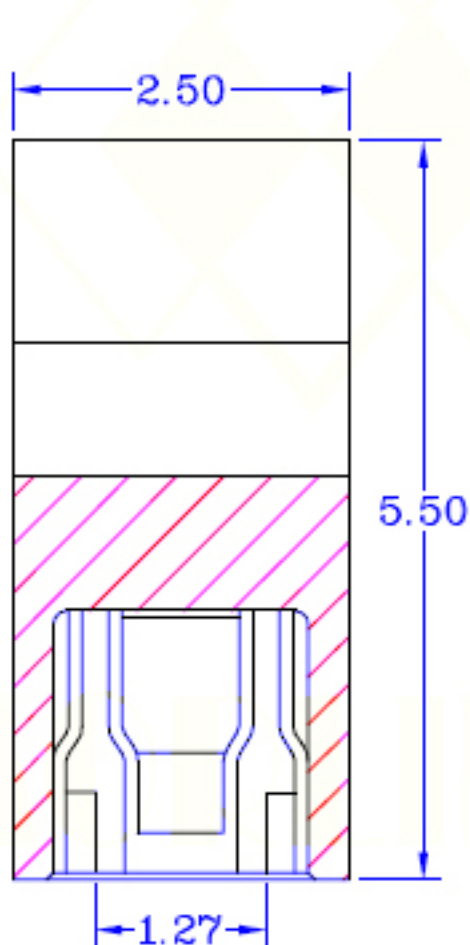
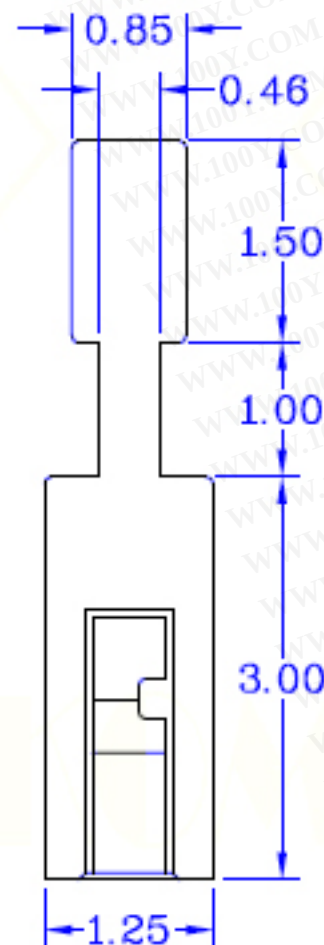


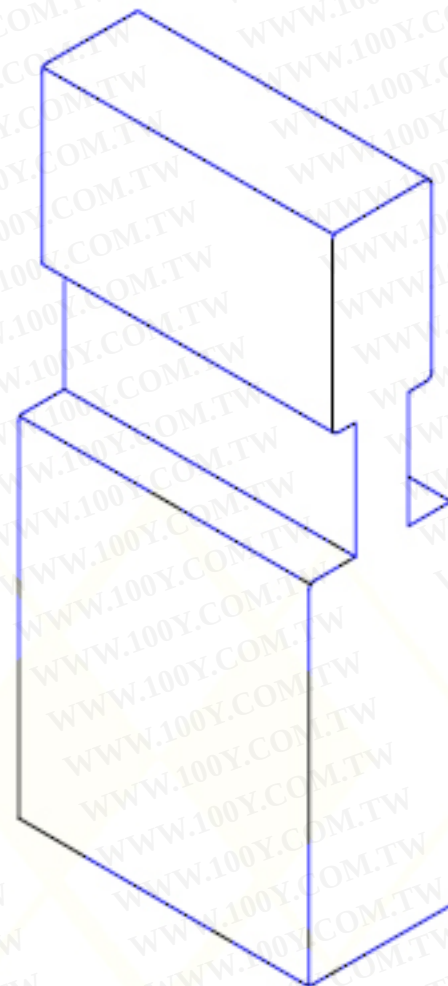

SPECIFICATION

ELECTRICAL

- Contact Current Rating : 2 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 650V AC RMS 60 Seconds

MECHANICAL

- Contact Retention Force : 900g/Pin Min
- Insertion Force : 500g/Pin Max
- Extraction Force : 100g/Pin Min

MATERIAL

- Insulator : NYLON 66
- Contact : Phosphor Bronze
- Contact Plated : Gold Plated , Nickel Plated

Operation Temperature : - 55°C to + 105°C

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT: mm