


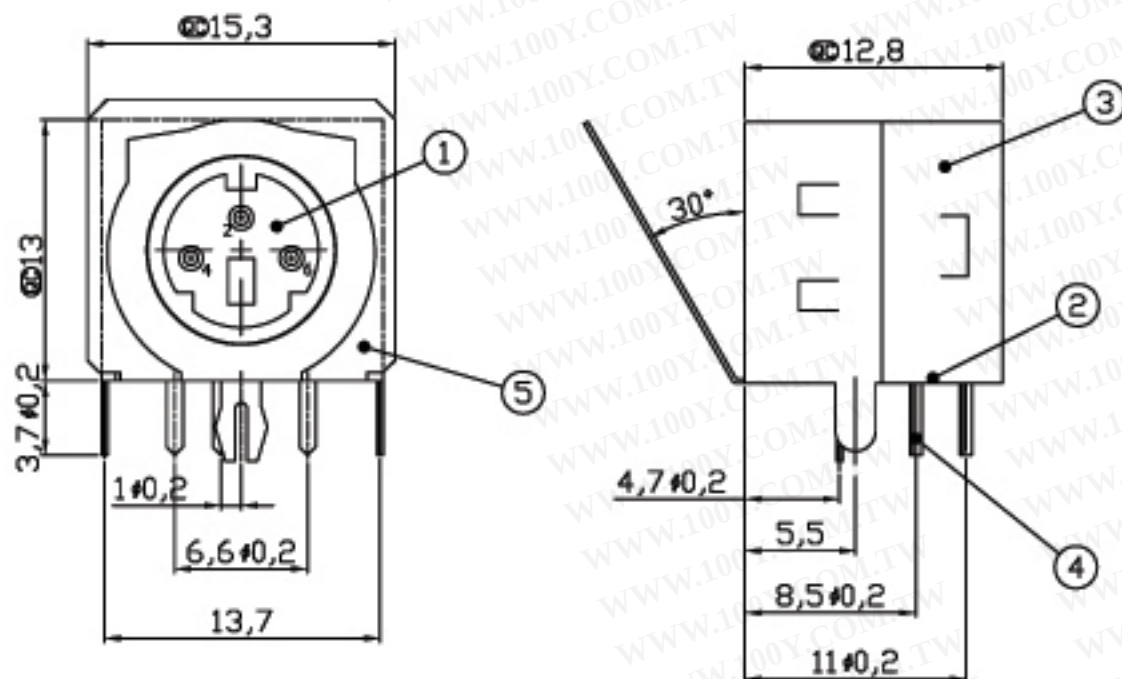

T:1.6 Dimensions of PC board holes
Tolerance:±0.1(Printed-top view)

LEAD FREE

SPECIFICATION

1. Rating : DC 50V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-35N;
6. life test: 1,000 cycles.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

5	SPRING	1	SUS301 T=0.1		
4	CONTACT FOOT	3	C5191 T=0.25	MB:Cu Ag PLATED	
3	COAT	1	C2680 T=0.25	MB:Cu Cu/Sn PLATED	
2	COVER	1	PBT 4815	UL-94V0	
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)	
NO	DESCRIPTION	QTY	MATERIAL	REMARK	
QC Inspection Item	DIMENSION IN mm [Inch]				
	TOLERANCE UNLESS OTHERWISE SPECIFIED		DWG NO.	FILE NO. HLS-9032V1A-001H	
	I ±0.5	X ± 3°	HLS-9032V1A(W/L)		
	XX ±0.3	XX ± 2°	TITLE S-JACK CUSTOMER COPY		
	XXX ±0.25				
	APPROVE	CHECK	DRAW	PROL	
JACK	ALAN	JULY	SCALE 1:1	REV A1	