


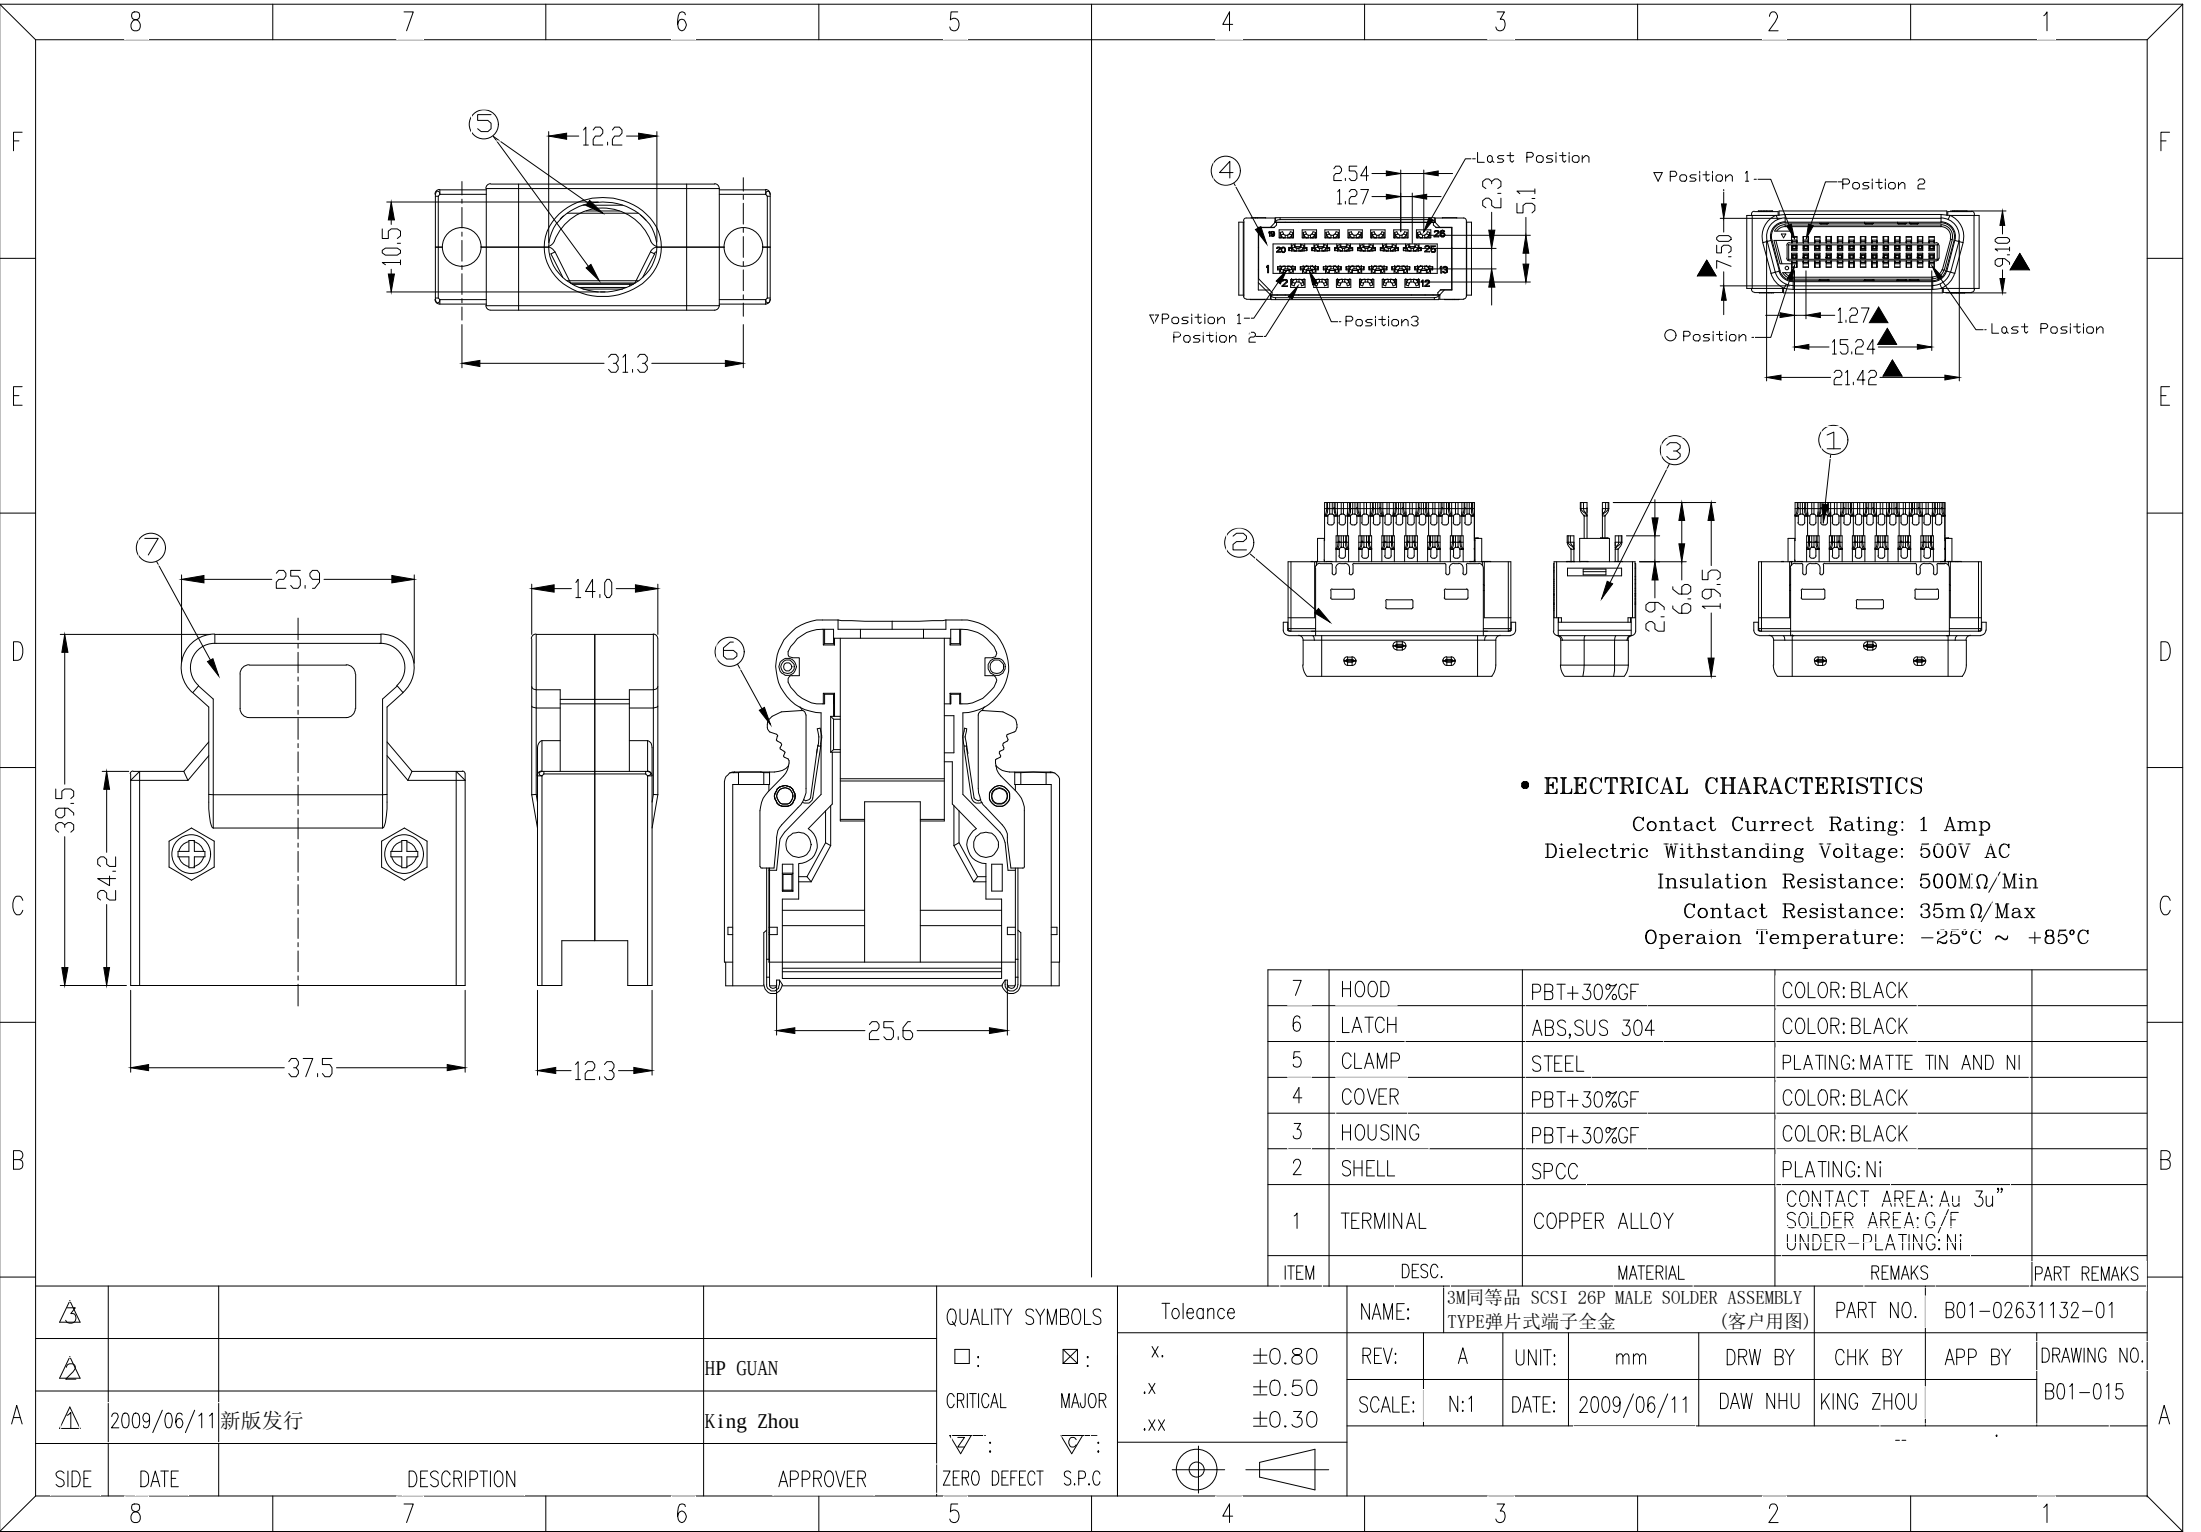

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -25°C ~ +85°C

7	HOOD	PBT+30%GF	COLOR:BLACK	
6	LATCH	ABS,SUS 304	COLOR:BLACK	
5	CLAMP	STEEL	PLATING:MATTE TIN AND NI	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: G/F UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

A					QUALITY SYMBOLS	Tolerance		NAME: 3M同等品 SCSI 26P MALE SOLDER ASSEMBLY TYPE弹片式端子全金 (客户用图)		PART NO. B01-02631132-01	
				HP GUAN	:	x.	±0.80	REV: A	UNIT: mm	DRW BY	CHK BY
		2009/06/11新版发行		King Zhou	CRITICAL MAJOR	.x	±0.50	SCALE: N:1	DATE: 2009/06/11	DAW NHU	APP BY
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx	±0.30				
	8	7	6	5	4	3	2	1			