






L Type

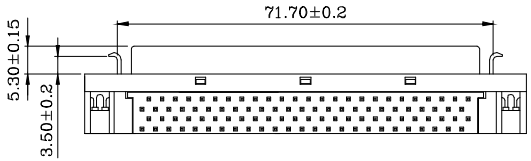



S Type



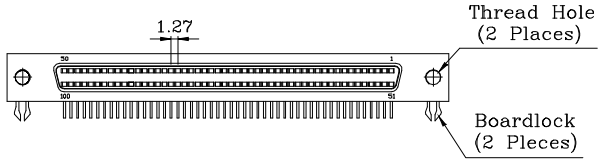


PCB Layout (B)

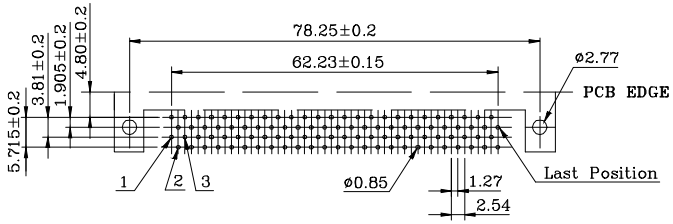- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: −25°C ~ +85°C

PART NO:
B02−100611EC−2X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

| ITEM | DESC. | MATERIAL | REMAKS | PART REMAKS |
|---|---|---|---|---|
| 6 | BOARDLOCK | COPPER ALLOY | PLATING:Tin | |
| 5 | BRACKET | SPCC | PLATING:Ni | |
| 4 | COVER | PBT+30%GF | COLOR:BLACK | |
| 3 | HOUSING | PBT+30%GF | COLOR:BLACK | |
| 2 | SHELL | SPCC | PLATING:Ni | |
| 1 | TERMINAL | PHOSPHOR BRONZE | CONTACT AREA:Au 5u"<br>SOLDER AREA:Sn<br>UNDER-PLATING:Ni | |

| SIDE | DATE | DESCRIPTION | APPROVER |
|---|---|---|---|
| A | 2008/06/11 | NEW ISSUE | JINGLI |

QUALITY SYMBOLS

□: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽: S.P.C

| Toleance | |
|---|---|
| x. | ±0.50 |
| .x | ±0.30 |
| .xx | ±0.25 |

| NAME: | SCSI PIN TYPE 100P F 90° DIP (客户用图) | | | | PART NO. | B02-100611EC-2X | |
|---|---|---|---|---|---|---|---|
| REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| SCALE: | N:1 | DATE: | 2008/06/11 | JINGLI | KING ZHOU | | B02-014 |