


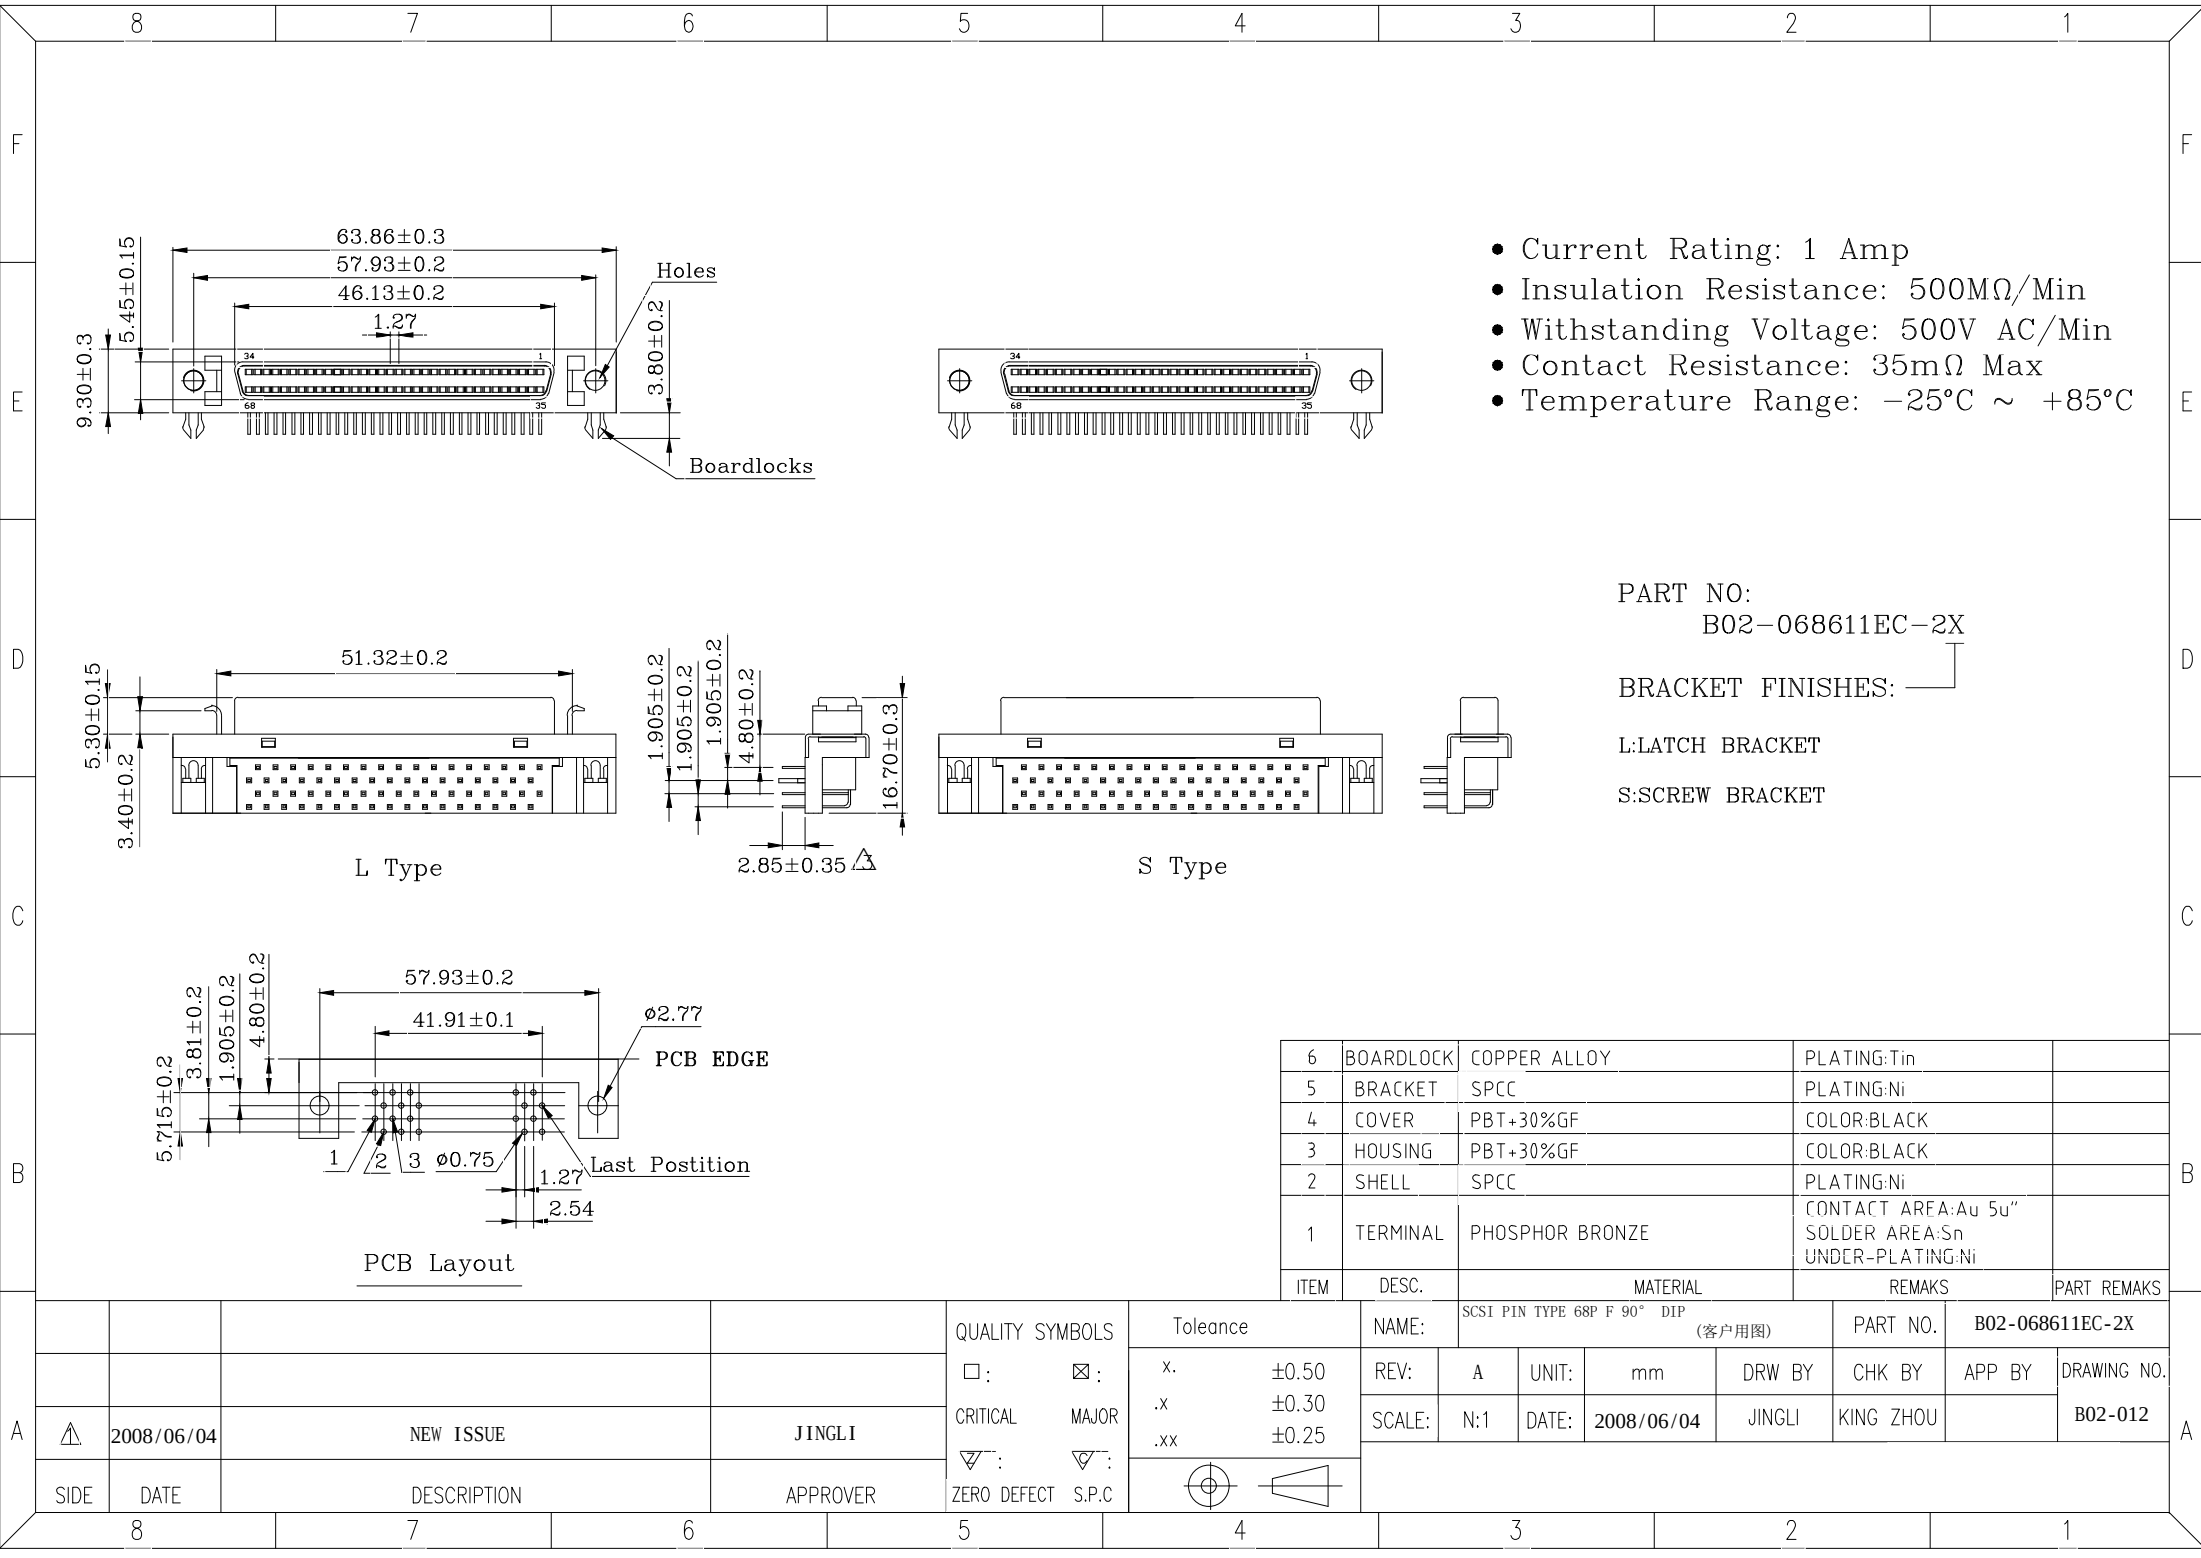

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO:
B02-068611EC-2X

BRACKET FINISHES:

L:LATCH BRACKET

S:SCREW BRACKET

6	BOARDLOCK	COPPER ALLOY	PLATING: Tin	
5	BRACKET	SPCC	PLATING: Ni	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS		Tolerance		NAME:	SCSI PIN TYPE 68P F 90° DIP (客户用图)				PART NO.		B02-068611EC-2X	
□:	☒:	.x	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2008/06/04	JINGLI	KING ZHOU		B02-012	
▽:	▽:	.xx	±0.25									
ZERO DEFECT	S.P.C											

△	2008/06/04	NEW ISSUE	JINGLI						
SIDE	DATE	DESCRIPTION	APPROVER						