



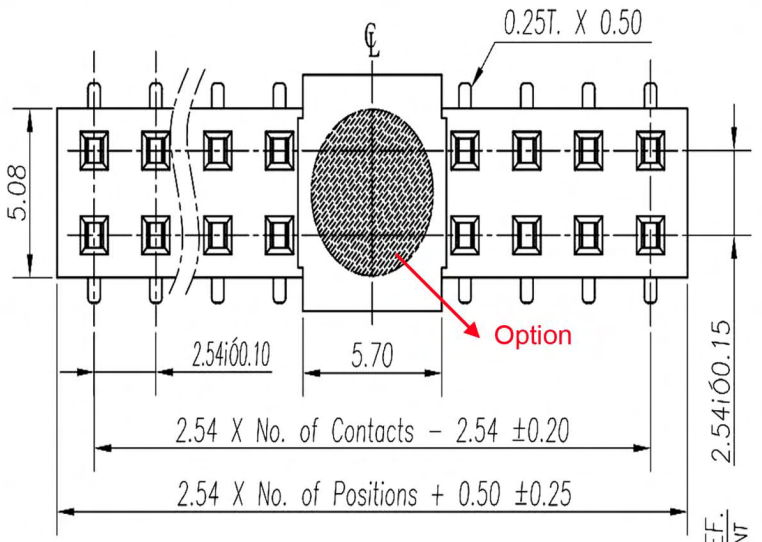


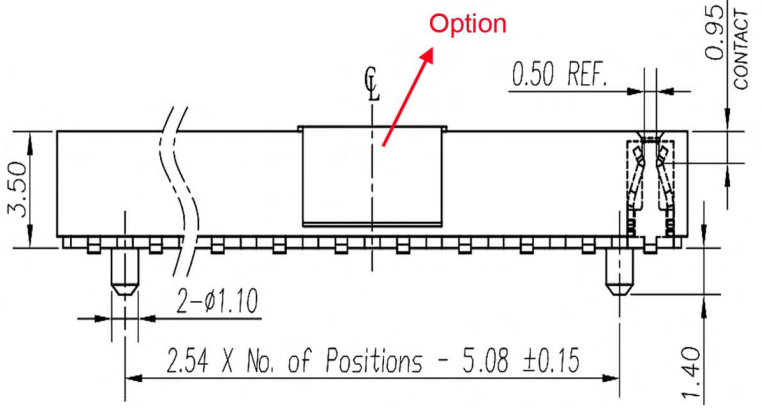




⚠With peg in 2X2Pin only.

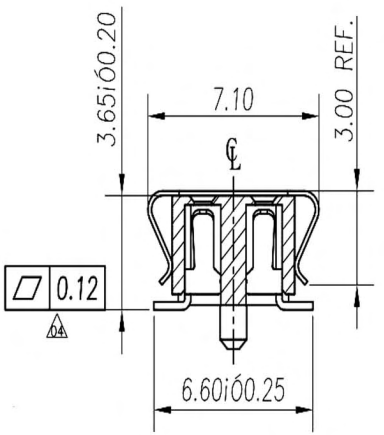



Specifications
Current Rating:3Amp ⚠
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

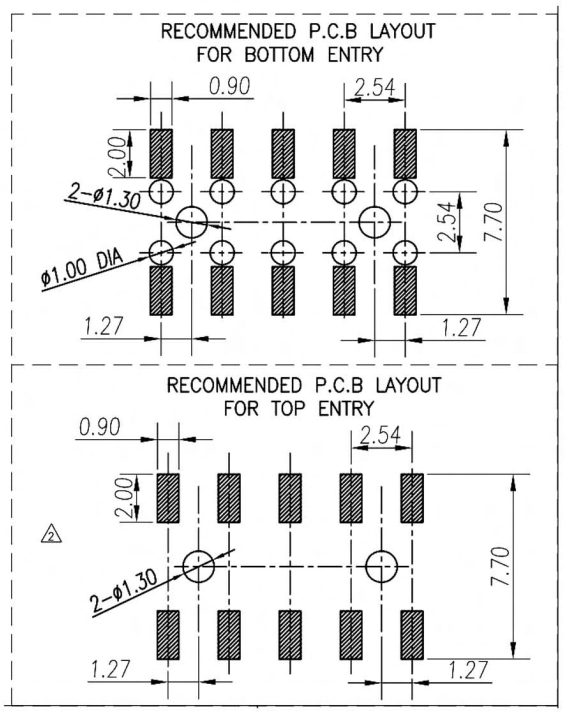

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

RoHS Compliant

HSM

HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核 准	Betty
DWG. 製 圖	Betty
DATE 制表日	2013/04/11
SCALE 比 例	參 考
UNIT 單 位	MM
PAGE 張 數	1 OF 1
SIZE. 紙張尺寸	A4
REV. 版 次	B

GENERAL TOLERANCE
X.°±5.0' X.±0.30
.X°±3.0' .X±0.25
.XX°±2.0' .XX±0.15
.XXX°±1.0' .XXX±0.10

PART NAME 品 名
2.54mm FEMALE HEADER DUAL ROW
H=3.56mm SMT TYPE 2XXXP
WITH LOCATING PEG ROHS

PART NO. 料 號 C2818-XXBDXHYXR